

## 860CMB 86" LCD touch all-in-one PC

Greentouch's 860CMB 86" of touch all-in-one combines together in style, flexibility and functionality for point-of-sale (POS), retail and hospitality applications, which is versatile and powerful. The optional System can be the current most popular ARM solution Android or intel X86 solutions like Linux, windows 7/8/10 system; providing VESA standard bracket, the common installation bracket and can be used worldwide.

### Features

- Optional touch technologies include: Greentouch infrared;
- Built-in pluggable PC module
- Ultra-thin body
- Ultra-low standby power consumption
- Worldwide agency approvals
- One year standard warranty


- "Designing for Touch" as the base
- Outstanding quality, reliability and Cost-effective

### About GreenTouch

Shenzhen GreenTouch Technology Co., Ltd. is a professional manufacturer of product. Our company specializes in R&D, manufacture and marketing of high-grade touch screen and value-added touch machine. Our company has our own brand—Green-Touch and provides customers with touch products including SAW touch screen, IR touch screen, four-wire touch screen, five-wire touch screen, various touch screen monitors and touch all in one PC TV. GreenTouch has automatic production lines and the sealed dust-free workshops and has been certified to ISO9001 Quality Management System and ISO14001 Environmental Management System. The products are inspected in strict accordance with the quality management system. Quality management becomes an essential part of operation. Our products have been certified to CE, FCC, ETL, ROHS and UL. The objective of GreenTouch is to become the most reliable supplier of touch screen, high value-added and special touch products and touch solutions in the world.

### Applications

- Information Kiosk
- Game and Entertainment
- Industrial Automation
- Self-checking service

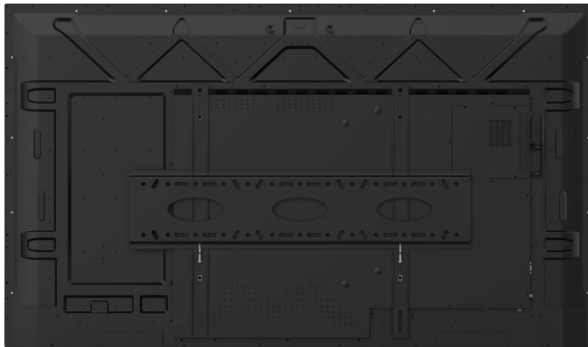

### Specifications

	Size	86"	
	Model	GT-TC-860CMB	
Exterior	Shell material	Aluminum alloy frame, black/white	
	Dimensions(mm)	1951.9×1125×89.1MM	
LCD	Screen type	86" diagonal, 16.9" Active matrix TFT LCD	
	Useful screen area(mm)	1892.16(H)×1064.22(V)	
	Resolution	4096*2160	
	Brightness (typical)	350cd/m2	
	Contrast ratio	1400:1	
	Colors	8 bit/16.7 Million	
	Viewing angle (from center)	Horizontal (left/right): 89/89° , or 178° in total; Vertical (up/down): 89/89° , or 178° in total	
Infrared touch screen parameters	Touch type	Infrared touch screen	
	Touch points	20	
	Touch drive mode	HID free drive	
	Touch screen glass	4MM tempered glass	
	Touch screen sensing method	Fingers or other non-transparent touch-sensitive media	
	Touch screen positioning resolution	4096X4096	
	Touch system communication port	USB 2.0	
	Detection function and calibration	With software automatic detection function	
	Responding speed	<8ms	
	Scan speed	100HZ/秒	
	Touch accuracy	≤2mm	
	Operating system	Support Win 7/8/10, Linux, android	
Service life	Theory unlimited		
Computer host configuration	Anti-external light test	Full angle resistance to ambient light	
	Motherboard	mini ITX architecture	
	Main chipset	Intel	
	CPU	Support Intel Celeron, Pentium, Core series	
	RAM	DDR_4G/8GOptional	
	Storage	SSD_32G/64G/128G/256G; HDD_500G	
	Graphics card	Nuclear display HD Graphics 3000	
	Network card	Integrated 10/100/1000M bpsEthernet	
	USB 3.0	3	
	USB 2.0	3	
	EARPHONE	1	
	MIC	1	
VGA output	1		
HDMI	1		
WiFi	Scalable2.4G/5G_150/300Mbps		
Bluetooth	Scalable		
MIC	1		
Standard motherboard	Model	BSD TK2	
	System version	Single Chip Microcomputer System	
	Processor	MCU processor	
	Input port	QPS-C 8PIN TOUCH USB*2,TVUSB*2,HDMI*2,VGA*1,AUDIO*1,PCUSB*1,AV*1,TV*1	
	Output port	AUDIO*1	
	Input resolution	3840*2160 60hz	
	Other functions	Multimedia function (playable video, picture, audio in U disk)	
	Sound output power	8Ω8W	
	Number of speakers	2	
	Power supply	Voltage range	AC 110~240V-50/60HZ
		Power consumption	About 330W
		Standby power consumption	≤0.5W
Surroundings	Operating temperature	-10° C - 55° C	
	Working humidity	10% - 90%RH, No condensation	
	Storage temperature	-20°C-60°C	
	Storage humidity	10% - 90%RH, No condensation	
Package	Package Size	2092x215x1319	
	Net weight	65.8kg	
	Gross weight	83kg	

### Ordering Information

Part Number	Display Ports	RAM	Storage	Surface Treatment	Availability
GT-TC-860CMB-I3-D4-H500	Intel Core i3	4G	500G(HDD)	Clear	Worldwide
GT-TC-860CMB-I5-D8-S128	Intel Core i5	8G	128G	Clear	Worldwide
GT-TC-860CMB-I7-D8-S256	Intel Core i7	8G	256G	Clear	Worldwide

To find out more about our extensive range of GreenTouch touch solutions, go to [www.greentouch.com.cn](http://www.greentouch.com.cn), or [ifo@greentouch.com.cn](mailto:ifo@greentouch.com.cn)

Service call: +86-755-29370883/29371519

Shenzhen GreenTouch Technology Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. GreenTouch (logo) and Shenzhen GreenTouch Technology Co., Ltd. Copyright . All rights reserved.

2016 Shenzhen GreenTouch Technology Co., Ltd. All rights reserved.