


版本	变更原因	日期	姓名

2.3±0.15



0.188mm Ito Film
1.8mm Ito Glass

3.00
HOUSING

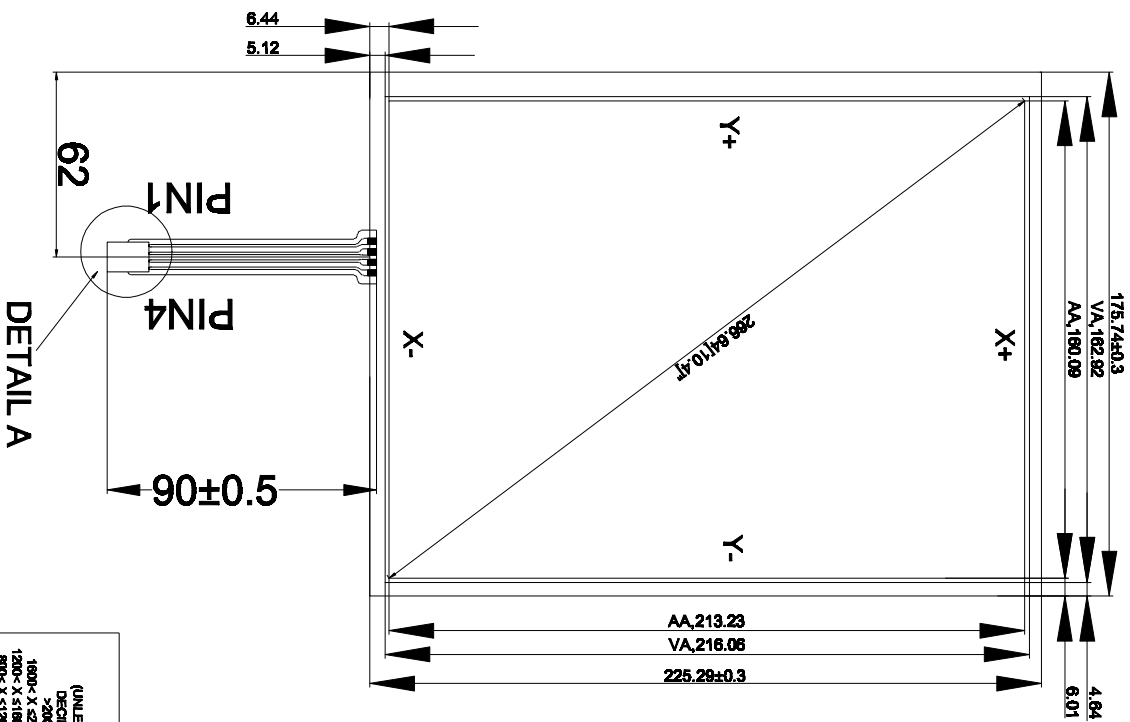

Notes:

1. Type: Film to Glass
2. Operating Voltage: ≤10V
3. Operation Temperature: -10°C ~ 60°C
Storage Temperature: -20°C ~ 70°C
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: ≤10ms
7. Linearity: ≤1.5%
8. Transmittance: ≥75%
9. Surface Hardness: ≥3H (pencil)
10. Operation force: 60g ~ 150g
11. Resistance: X: 360Ω-879Ω Y: 203Ω-496Ω

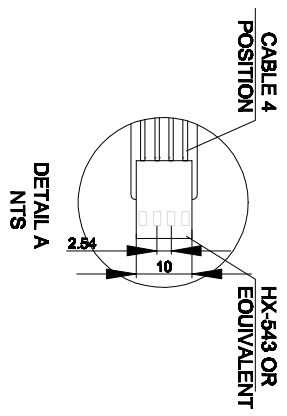

TOLERANCES
(UNLESS OTHERWISE STATED)
DECIMALS ANGLES ±0.5%

>2000MM	±2.00MM
1800< X ≤2000MM	±1.20MM
1300< X ≤1800MM	±0.80MM
800< X ≤1300MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM

绿城触控
GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	Size	Ratio
GT-4W-1044-1	10.4"	4:3
Structure	mm	1:1
Design	Date	Page
2015.7.20	2015.7.20	1/1
Check	Date	Version
2015.7.20	2015.7.20	A0
Release	Date	
2015.7.20		