



版本	变更原因	日期	姓名

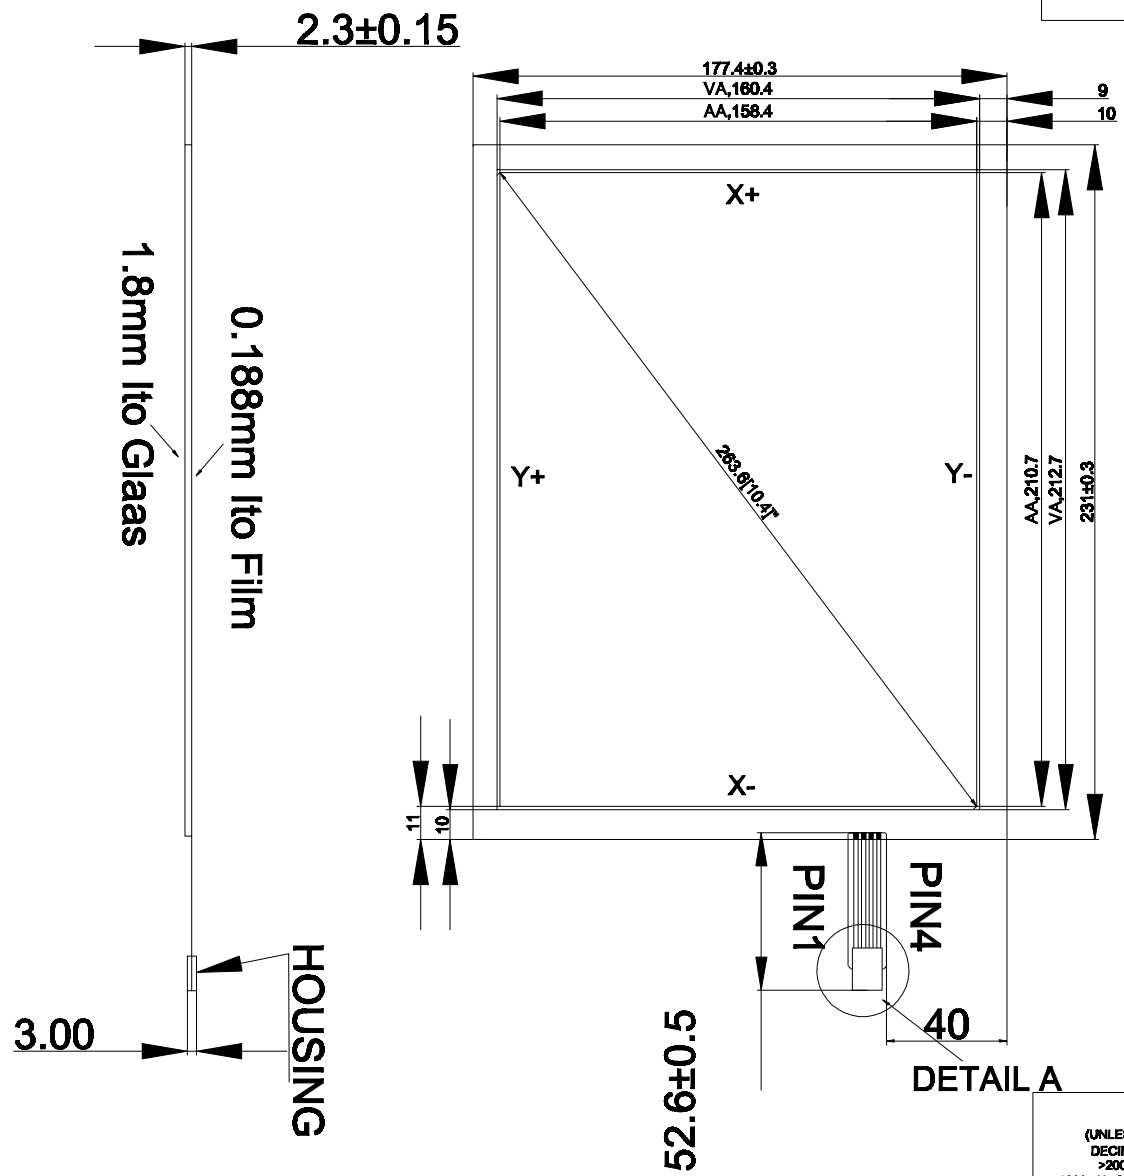

- Notes:**
- 1.Type:Film to Glass
  - 2.Operating Voltage:≤10v
  - 3.Operation Temperature:-10℃~60℃  
Storage Temperature:-20℃~70℃
  - 4.Life Time:1.000.000 times
  - 5.Connect Material:FPC
  - 6.Response Time:≤10ms
  - 7.Linearity:≤1.5%
  - 8.Transmittance:≥75%
  - 9.Surface Hardness≥3H(pencil)
  - 10.Operation force:60g~150g
  - 11.Resistance:X:360Ω-879Ω Y:203Ω-496Ω

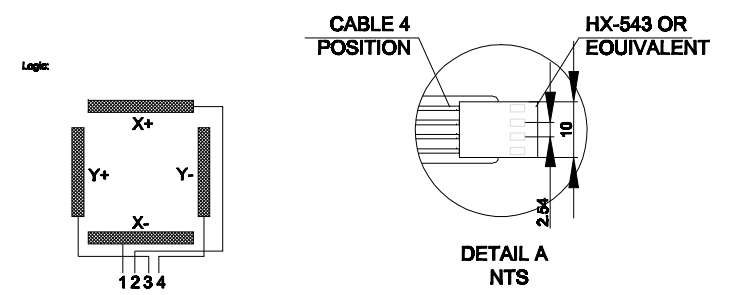

**TOLERANCES (UNLESS OTHERWISE STATED)**

DECIMALS	ANGLES
>2000MM	±2.00MM
1600< X ≤2000MM	±1.20MM
1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM

**格林触控 GreenTouch** Shenzhen GreenTouch Technology Co.,Ltd

Model No.:	GT-4W-104C-1	Size	10.4"	Ratio	16:9
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.10.5	Page	1/1
Check	付作书	Date	2015.10.5	Version	A0
Release	汪陈	Date	2015.10.5		