


Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-20^{\circ}C \sim 65^{\circ}C$
Storage Temperature: $-30^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 75\%$
9. Surface Hardness: $\geq 3H$ (pencil)
10. Operation force: 60g \sim 150g
11. Resistance: X: 360 Ω -880 Ω Y: 200 Ω -500 Ω

Logic:

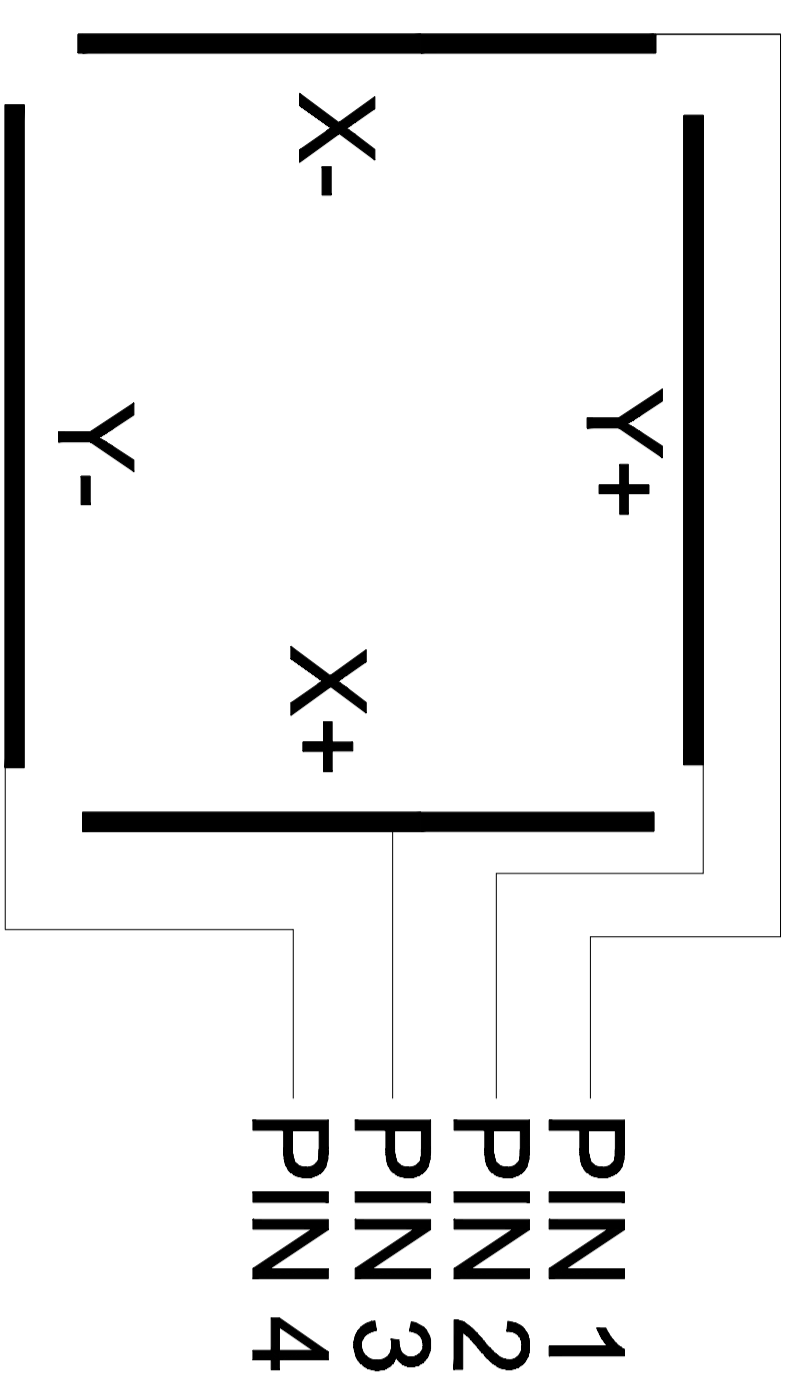

TOLERANCES (UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	$\pm 0.5\%$
$>2000MM$	$\pm 2.00MM$	
$1600 < X \leq 2000MM$	$\pm 1.20MM$	
$1200 < X \leq 1600MM$	$\pm 0.80MM$	
$800 < X \leq 1200MM$	$\pm 0.50MM$	
$400 < X \leq 800MM$	$\pm 0.40MM$	
$120 < X \leq 400MM$	$\pm 0.30MM$	
$30 < X \leq 120MM$	$\pm 0.20MM$	
$< 30MM$	$\pm 0.10MM$	

		Greentouch Technology Co., Ltd	
		Model No.:	GT-4W-15A-1
Structure	G+F	Size	15"
Design	李俊	Unit	mm
Check	付作丰	Date	2020.06.08
Release	汪陈	Date	2020.06.08
		Ratio	4:3
		Scale	1:1
		Page	1/1
		Version	A0