
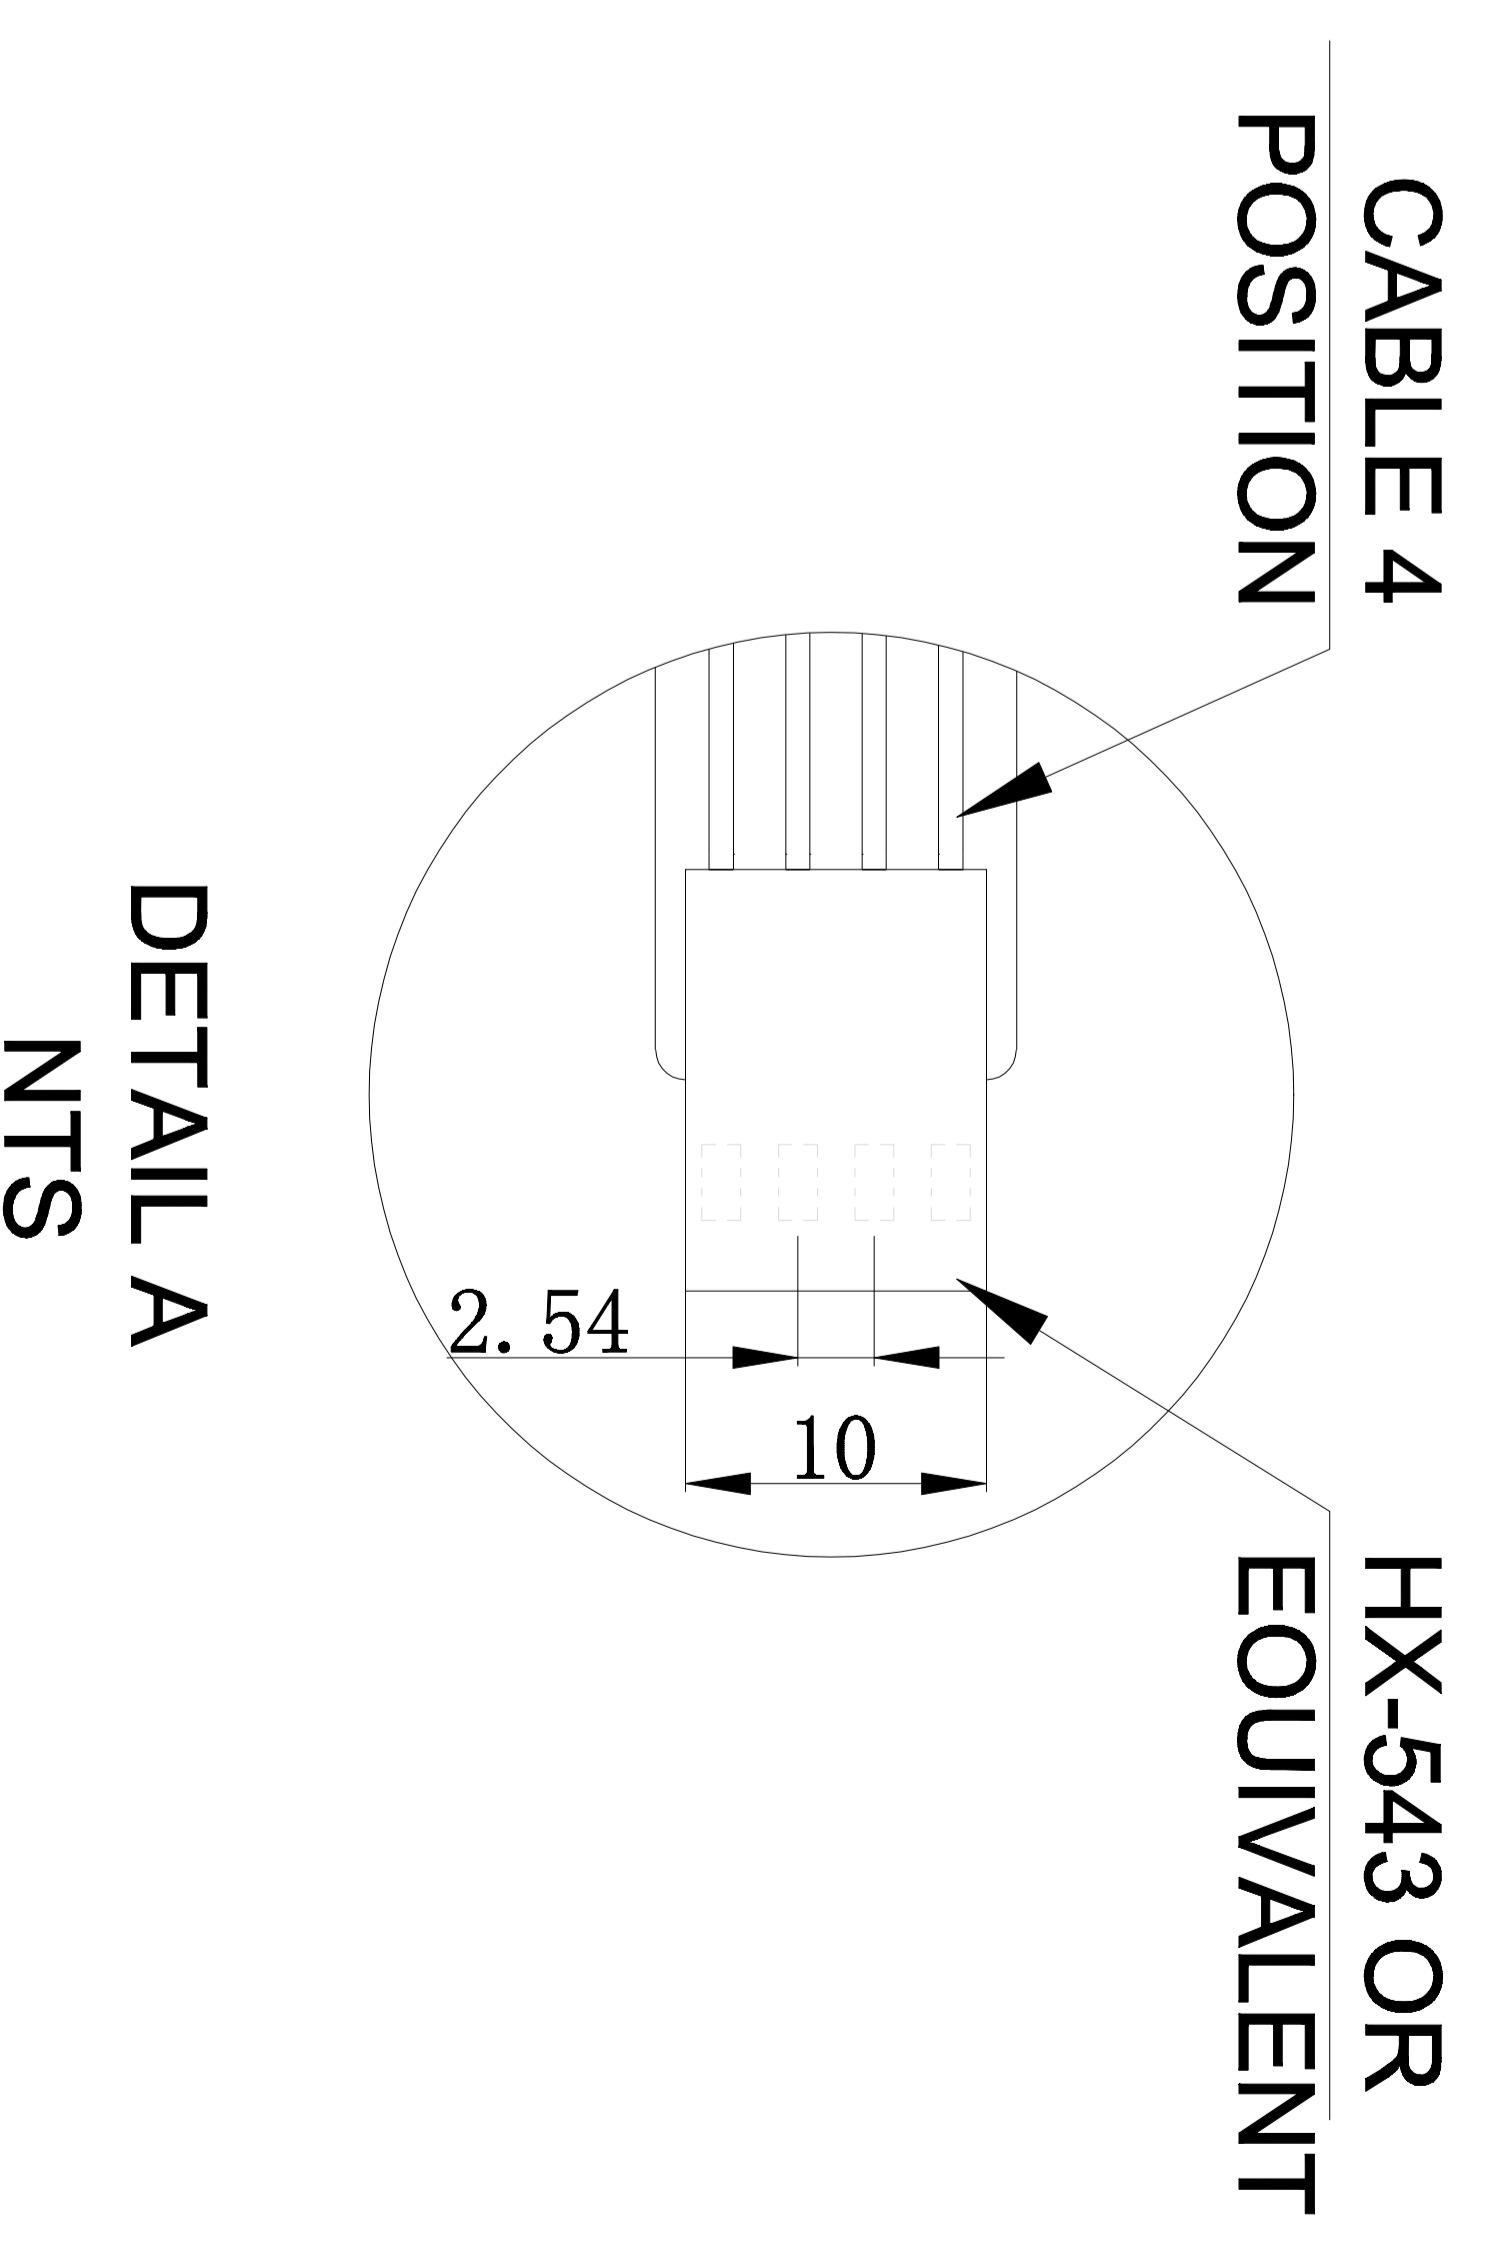


Logic:

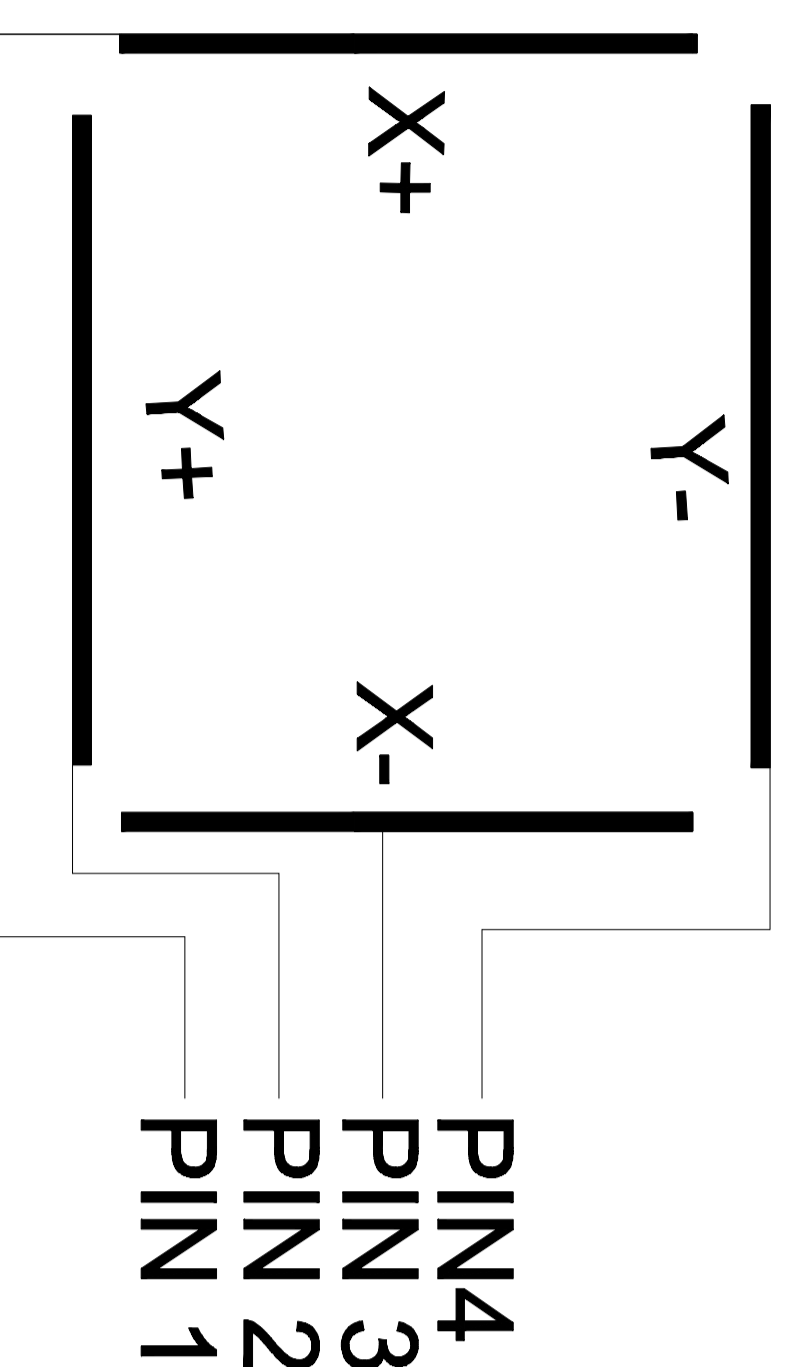

**Notes:**

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Operation Temperature:-20℃~65℃  
Storage Temperature:-30℃~70℃
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:480-1174Ω Y:152Ω-371Ω

TOLERANCES (UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	±0.5%
>2000MM	±2.00MM	
1600< X ≤2000MM	±1.20MM	
1200< X ≤1600MM	±0.80MM	
800< X ≤1200MM	±0.50MM	
400< X ≤800MM	±0.40MM	
120< X ≤400MM	±0.30MM	
30< X ≤120MM	±0.20MM	
<30MM	±0.10MM	

		GreenTouch Technology Co.,Ltd	
		Model No.:	GT-4W-156A-1
Structure	G+F	Size	15.6"
Design	李俊	Unit	mm
Check	付作丰	Date	2020.08.18
Release	汪陈	Date	2020.08.18
		Ratio	16:9
		Scale	1:1
		Page	1/1
		Version	A0