
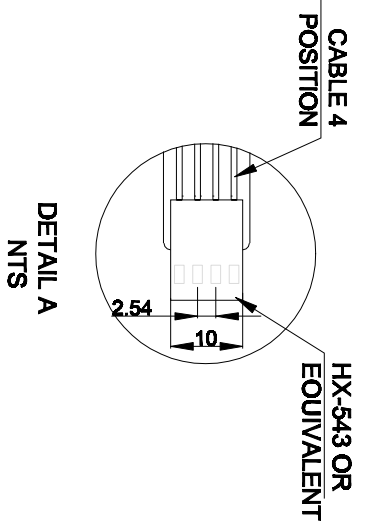


Logic:



- Notes:
1. Type: Film to Film
  2. Operating Voltage:  $\leq 10V$
  3. Operation Temperature:  $-20^{\circ}C \sim 65^{\circ}C$   
Storage Temperature:  $-30^{\circ}C \sim 70^{\circ}C$
  4. Life Time: 1,000,000 times
  5. Connect Material: FPC
  6. Response Time:  $\leq 10ms$
  7. Linearity:  $\leq 1.5\%$
  8. Transmittance:  $\geq 75\%$
  9. Surface Hardness:  $\geq 3H$  (pencil)
  10. Operation force:  $60g \sim 150g$
  11. Resistance: X:  $480\Omega - 1174\Omega$  Y:  $152\Omega - 371\Omega$

TOLERANCES (UNLESS OTHERWISE STATED) DECIMALS ANGLES ±0.5%		Green Touch Technology Co., Ltd	
1800 < X ≤ 200MM	±1.20MM	Model No.:	GT-4H-18.5B2
200MM < X ≤ 250MM	±2.00MM	Structure:	F+T
250MM < X ≤ 300MM	±2.50MM	Size:	18.5"
300MM < X ≤ 350MM	±3.00MM	Unit:	mm
350MM < X ≤ 400MM	±3.50MM	Scale:	1:1
400MM < X ≤ 450MM	±4.00MM	Date:	2015.8.5
450MM < X ≤ 500MM	±4.50MM	Check:	何作书
500MM < X ≤ 550MM	±5.00MM	Date:	2015.8.5
550MM < X ≤ 600MM	±5.50MM	Released:	张强
600MM < X ≤ 650MM	±6.00MM	Date:	2015.8.5
650MM < X ≤ 700MM	±6.50MM	Ratio:	1/89
700MM < X ≤ 750MM	±7.00MM	Page:	1/1
750MM < X ≤ 800MM	±7.50MM	Version:	A.0