


- Notes:**
1. Type: Film to Film
  2. Operating Voltage:  $\leq 10V$
  3. Operation Temperature:  $-20^{\circ}C \sim 65^{\circ}C$   
Storage Temperature:  $-30^{\circ}C \sim 70^{\circ}C$
  4. Life Time: 1,000,000 times
  5. Connect Material: FPC
  6. Response Time:  $\leq 10ms$
  7. Linearity:  $\leq 1.5\%$
  8. Transmittance:  $\geq 75\%$
  9. Surface Hardness:  $\geq 3H$  (pencil)
  10. Operation force:  $60g \sim 150g$
  11. Resistance: X:  $333\Omega-814\Omega$  Y:  $220\Omega-536\Omega$

Logic:

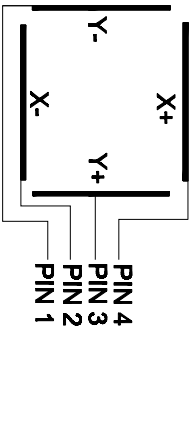

0.188mm Ito Film  
0.188mm Ito Film

TOLERANCES (UNLESS OTHERWISE STATED) DECIMALS ANGLES ±0.5%		GreenTouch Technology Co., Ltd	
1800 < X ≤ 2000MM	±2.00MM	±2.00MM	
1200 < X ≤ 1800MM	±1.20MM	±1.20MM	
800 < X ≤ 1200MM	±0.50MM	±0.50MM	
400 < X ≤ 800MM	±0.40MM	±0.40MM	
120 < X ≤ 400MM	±0.20MM	±0.20MM	
< 120MM	±0.10MM	±0.10MM	

Model No.:	GT-4H-19A-2	Size	19"	Ratio	4:3
Structure	F+T	Unit	mm	Scale	1:1
Design	张林	Date	2015.7.11	Page	1/1
Check	张林	Date	2015.7.11	Version	A.0
Released	张林	Date	2015.7.11		