


- Notes:**
1. Type: Film to Film
  2. Operating Voltage:  $\leq 10V$
  3. Operation Temperature:  $-20^{\circ}C \sim 65^{\circ}C$   
Storage Temperature:  $-30^{\circ}C \sim 70^{\circ}C$
  4. Life Time: 1,000,000 times
  5. Connect Material: FPC
  6. Response Time:  $\leq 10ms$
  7. Linearity:  $\leq 1.5\%$
  8. Transmittance:  $\geq 75\%$
  9. Surface Hardness:  $\geq 3H$  (pencil)
  10. Operation force:  $60g \sim 150g$
  11. Resistance: X:  $483\Omega$ - $1181\Omega$  Y:  $151\Omega$ - $369\Omega$

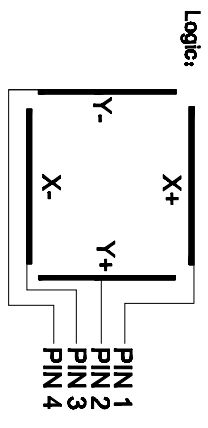

<p>(UNLESS OTHERWISE STATED) DIMENSIONS ANGLES <math>\pm 0.5\%</math></p> <p><b>TOLERANCES</b></p> <p>2000MM <math>\pm 2.00MM</math></p> <p>1200 &lt; X <math>\pm 2.00MM</math></p> <p>800 &lt; X <math>\pm 1.20MM</math></p> <p>400 &lt; X <math>\pm 0.80MM</math></p> <p>200 &lt; X <math>\pm 0.40MM</math></p> <p>&lt; 200MM <math>\pm 0.10MM</math></p>		<p>Model No.: GT-4H-215A-2</p> <p>Structure: F+T</p> <p>Design: 3H/6</p> <p>Check: 4H/7H</p> <p>Released: 2015.7.5</p>	<p>Size: <b>21.5"</b></p> <p>Unit: mm</p> <p>Date: 2015.7.5</p> <p>Date: 2015.7.5</p> <p>Date: 2015.7.5</p>	<p>Ratio: 16:9</p> <p>Scale: 1:1</p> <p>Page: 1/1</p> <p>Version: A.0</p>
<p><b>GreenTouch</b></p> <p>GreenTouch Technology Co., Ltd</p>				