
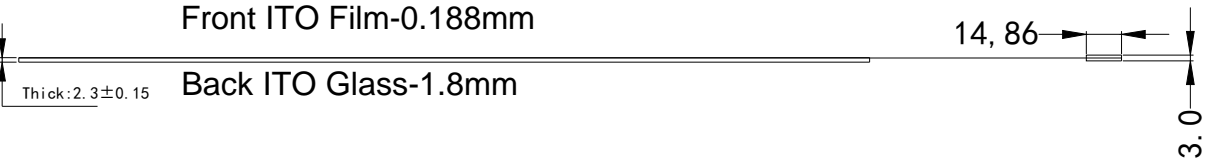


UR	LR	OUT	PIN
		UL	PIN1
	COM	UR	PIN2
	MON	COM	PIN3
UL	LL	LR	PIN4
		LL	PIN5

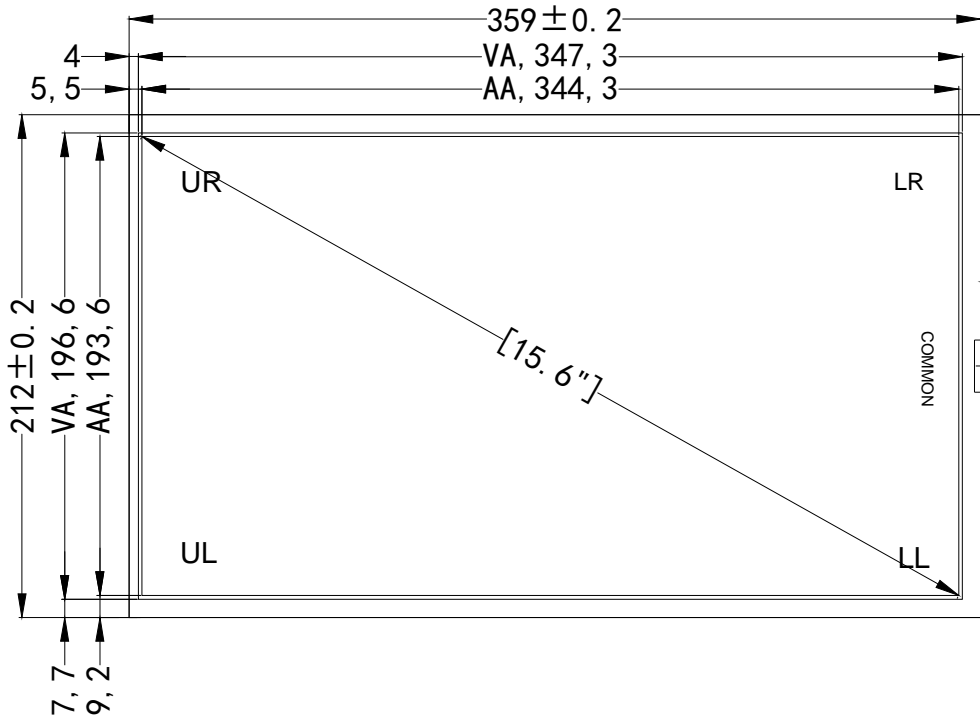

- Notes:
- 1.Type:Film to Glass
 - 2.Operating Voltage:10V
 - 3.Operation Temperature:-20°C~65°C
Storage Temperature:-30°C~70°C
 - 4.Life Time:1,000,000 times
 - 5.Connect Material:FPC
 - 6.Response Time:10ms
 - 7.Linearity:±1.5%
 - 8.TransmittanceK 75%
 - 9.Surface Passivation:HPQ-1&D
 - 10.Operation force:60g~150g

FFËJ^* ä cã) &K € < PIN1,PIN2 < G €
 i € < PIN2,PIN4 < G €
 //////////////// € < PIN4,PIN5 < G €
 //////////////// € < PIN5,PIN1 < G €

TOLERANCES (UNLESS OTHERWISE STATED)		GreenTouch Technology Co.,Ltd	
Model No.:	GT-5W-15.6A-1	Size	15.6"
Structure	G+F	Unit	mm
Design		Date	2015.8.5
Check		Date	2015.8.5
Release		Date	2015.8.5
Ratio	16:9	Scale	1:1
Page	1/1	Version	A0