
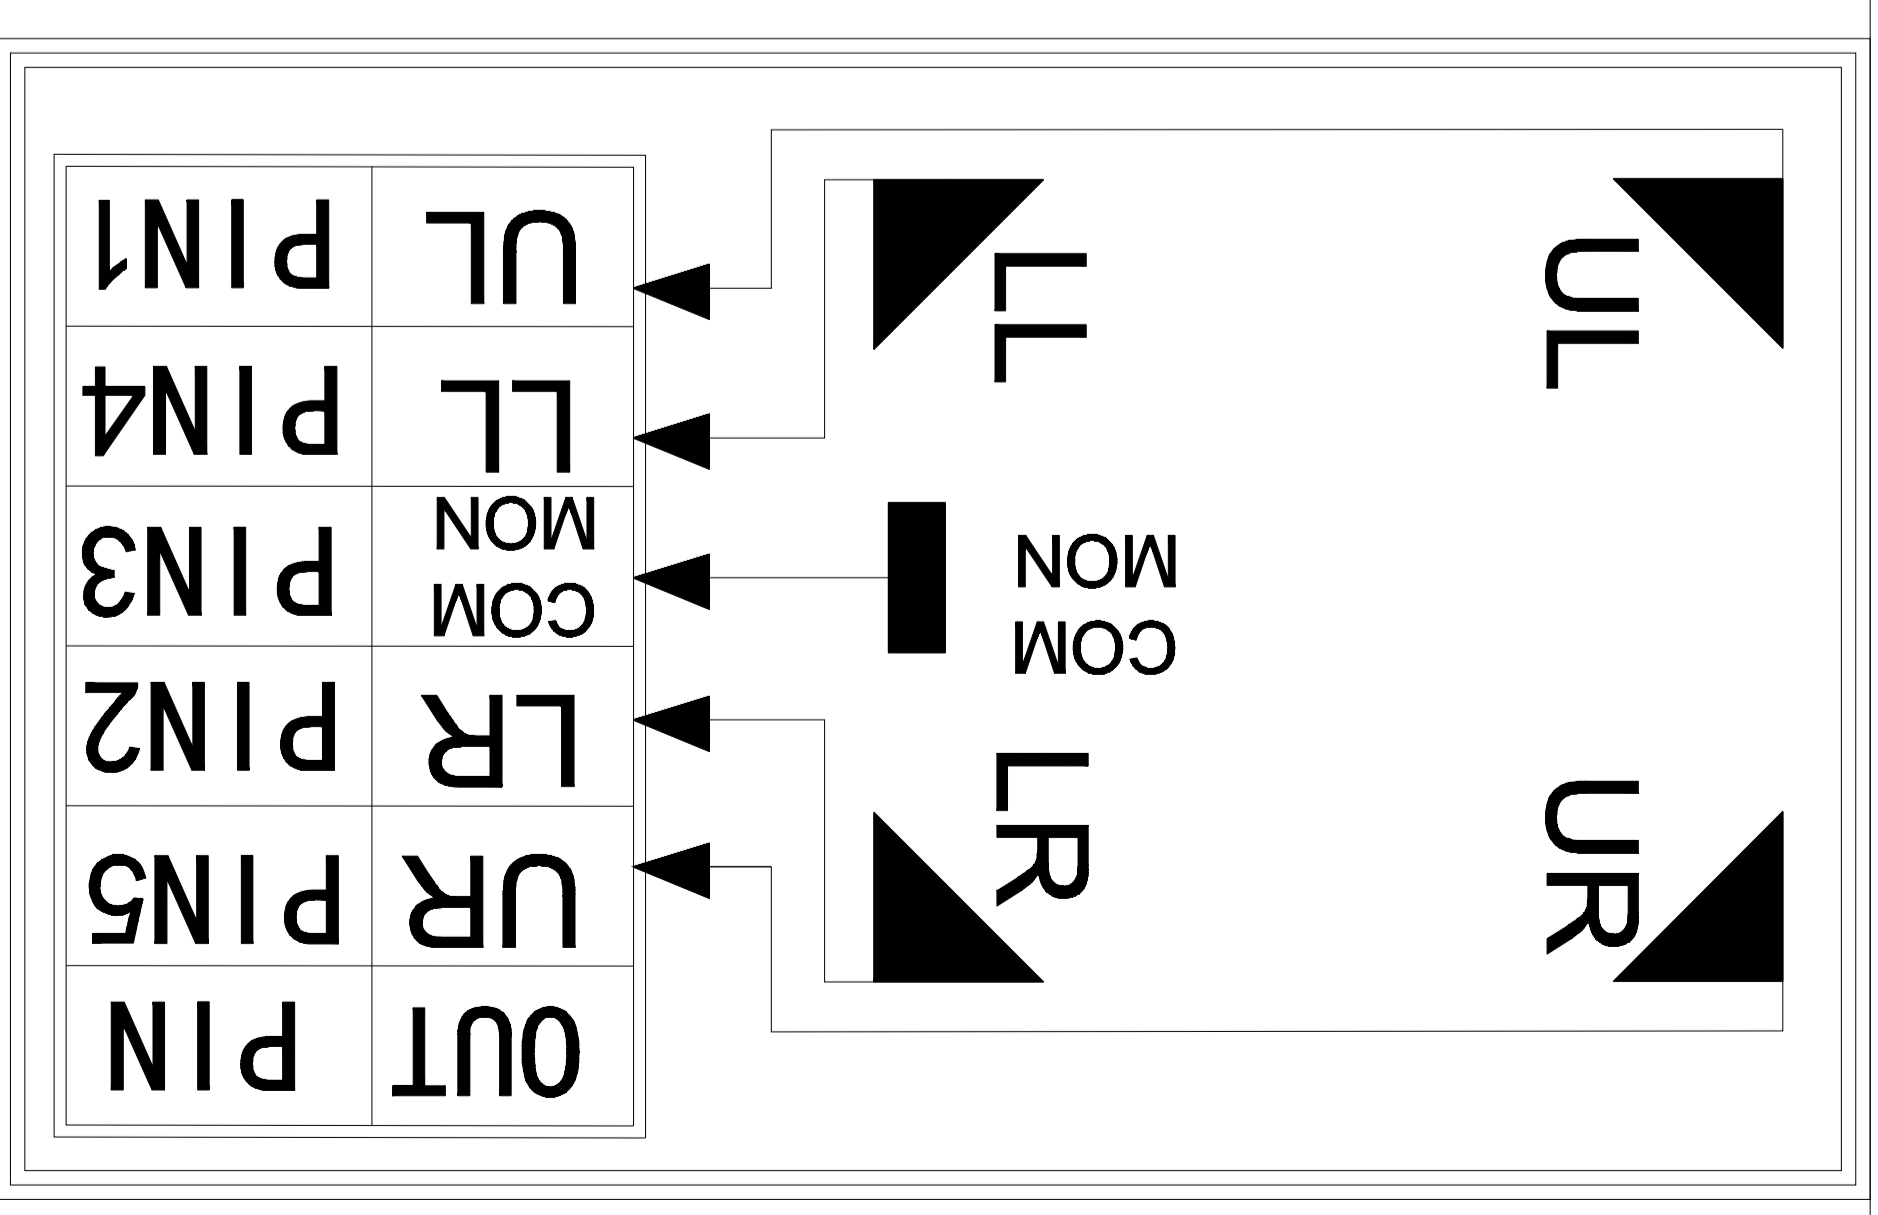


Thick: 2.3 ± 0.15
 Front ITO Film-0.188mm
 Back ITO Glass-1.8mm

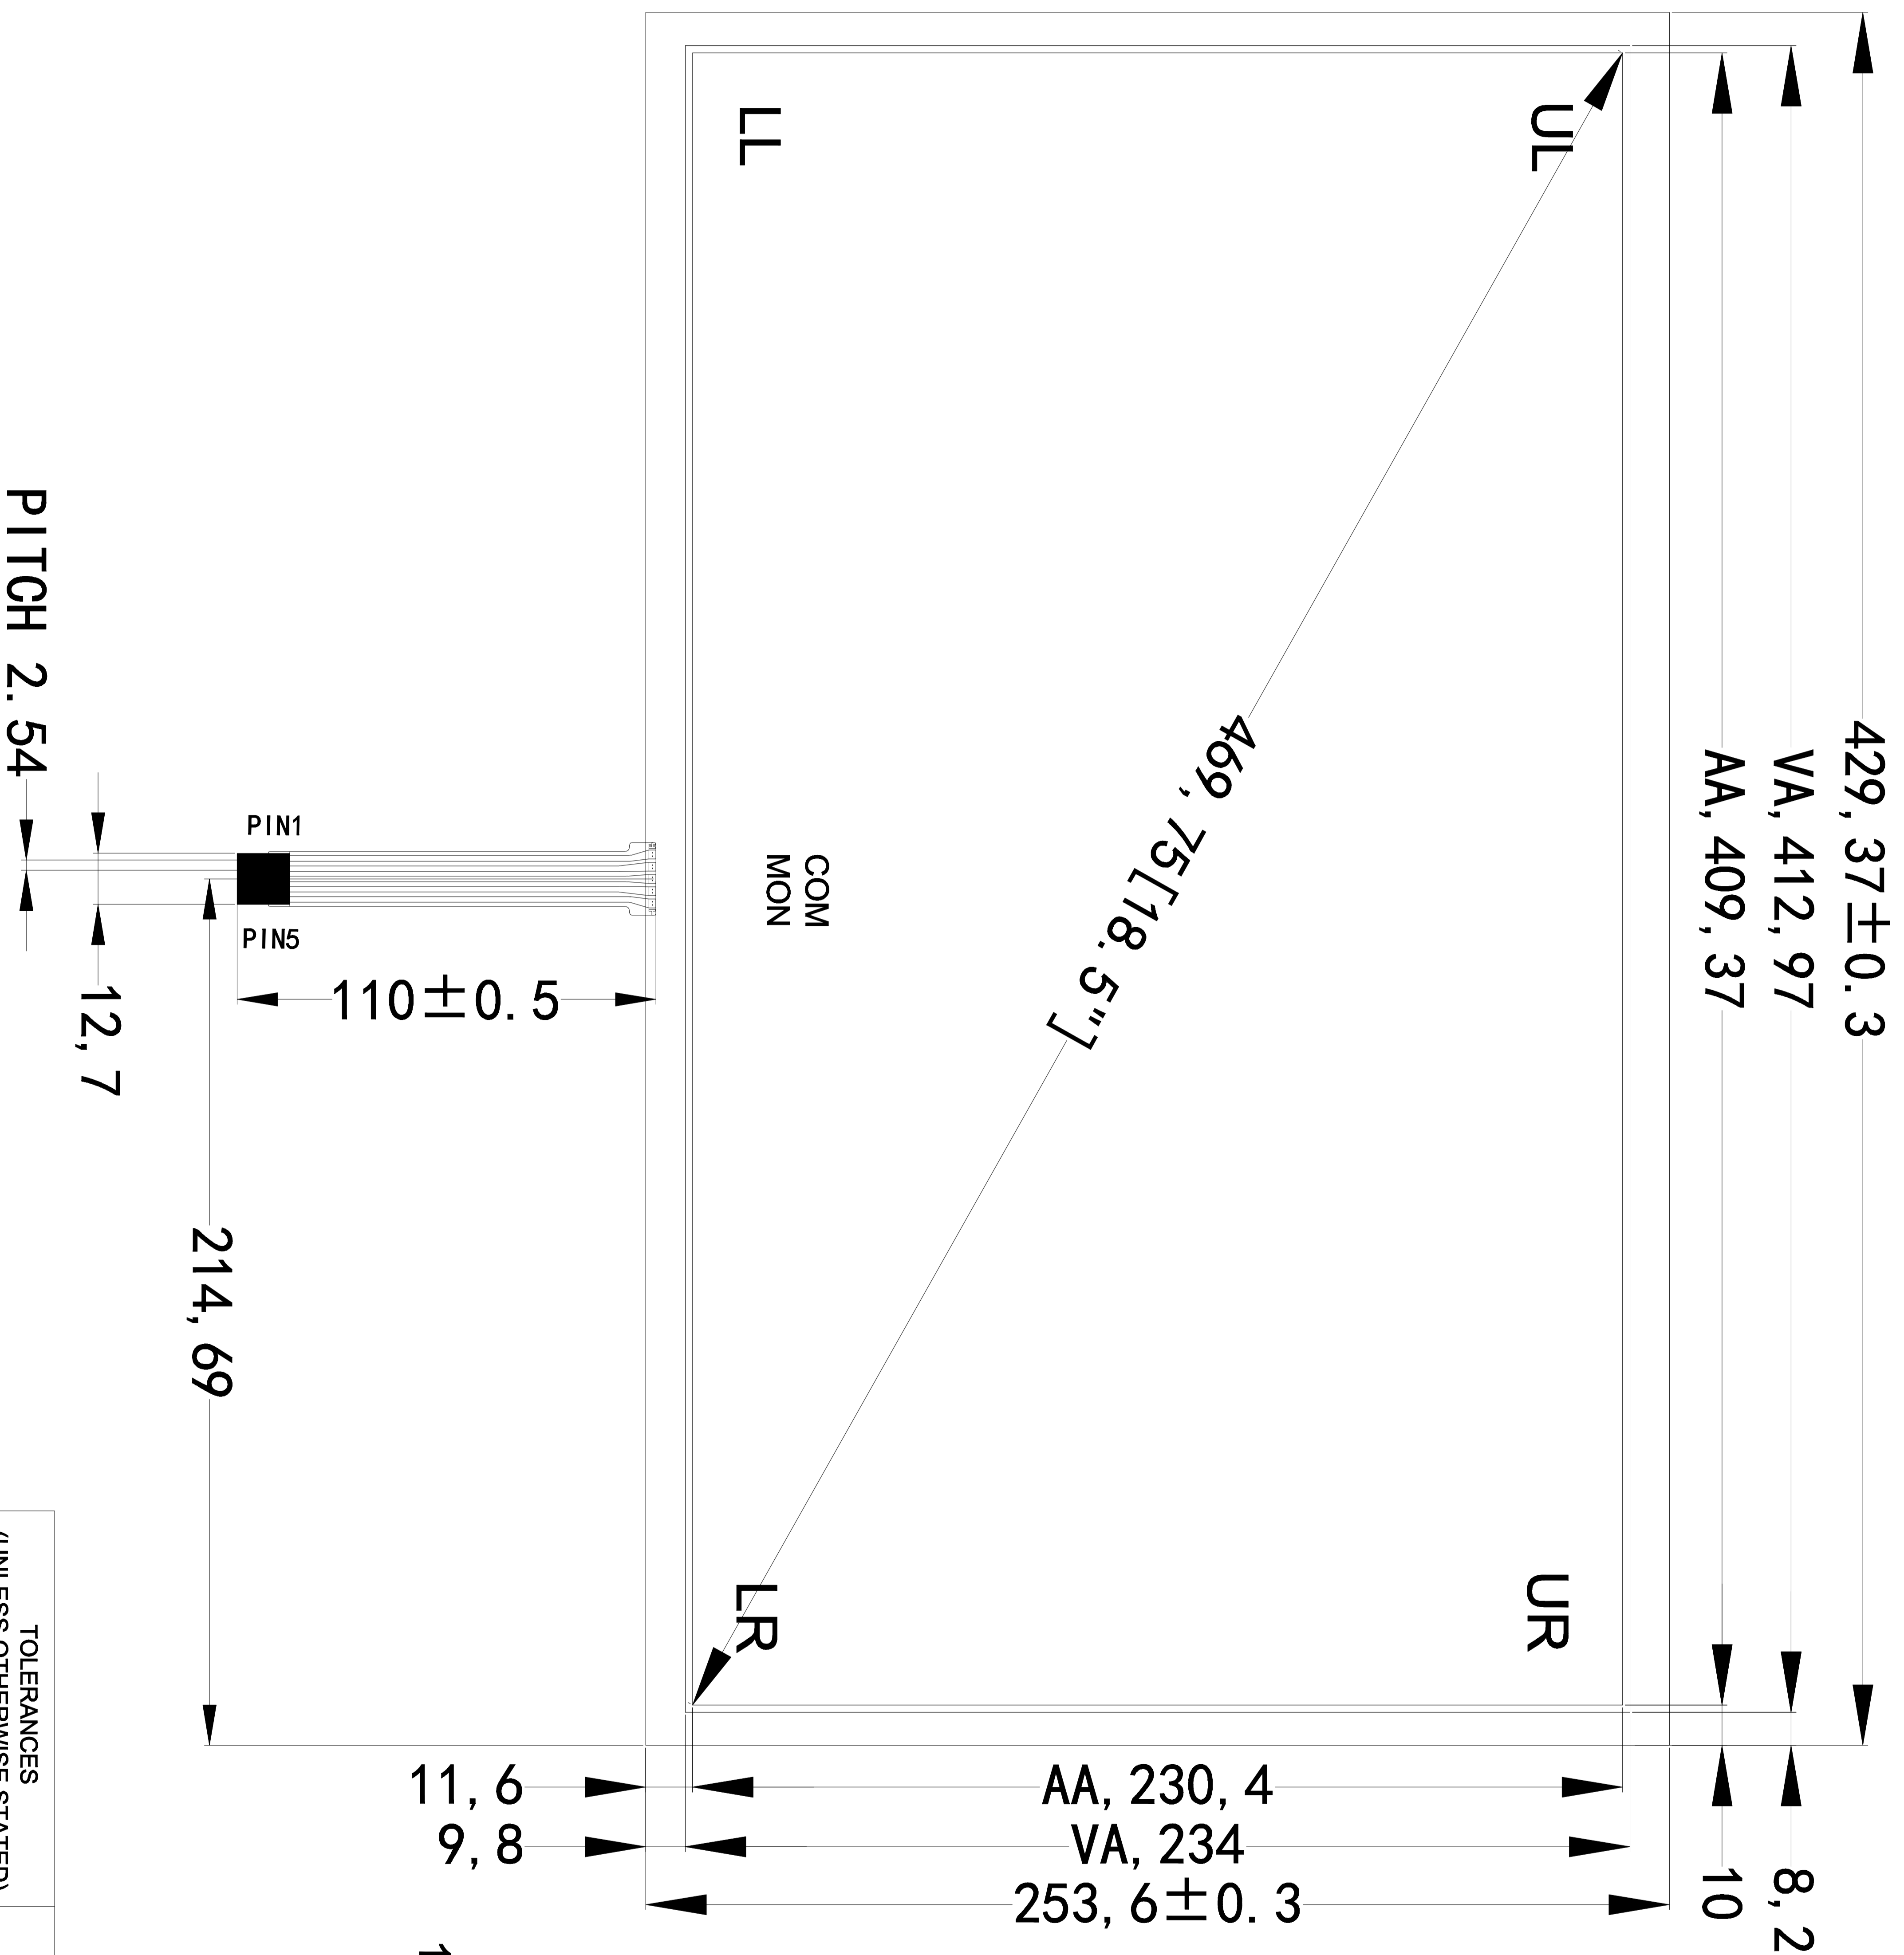

Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-20^{\circ}C \sim 65^{\circ}C$
Storage Temperature: $-30^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 75\%$
9. Surface Hardness: $\geq 3H$ (pencil)
10. Operation force: $60g \sim 150g$

11. Resistance: $50\Omega < PIN1, PIN2 < 250\Omega$
 $50\Omega < PIN2, PIN4 < 250\Omega$
 $50\Omega < PIN4, PIN5 < 250\Omega$
 $50\Omega < PIN5, PIN1 < 250\Omega$

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	$\pm 0.5\%$
$> 2000MM$		$\pm 2.00MM$
$1600 < X \leq 2000MM$		$\pm 1.20MM$
$1200 < X \leq 1600MM$		$\pm 0.80MM$
$800 < X \leq 1200MM$		$\pm 0.50MM$
$400 < X \leq 800MM$		$\pm 0.40MM$
$120 < X \leq 400MM$		$\pm 0.30MM$
$30 < X \leq 120MM$		$\pm 0.20MM$
$< 30MM$		$\pm 0.10MM$

		GreenTouch Technology Co., Ltd	
		Model No.:	GT-SW-185A-1
Structure	G+F	Size	18.5"
Design	李俊	Unit	mm
Check	付作书	Date	2015.8.5
Release	汪陈	Date	2015.8.5
		Ratio	16:9
		Scale	1:1
		Page	1/1
		Version	A0