

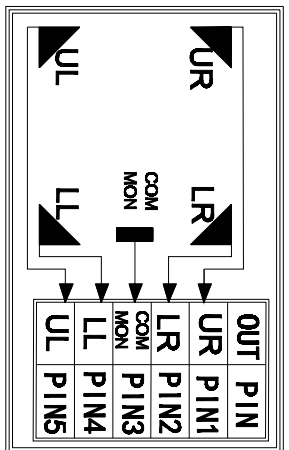


Front ITO Film-0.188mm
Back ITO Glass-1.8mm

- Notes:
- 1.Type:Film to Glass
 - 2.Operating Voltage:≤10V
 - 3.Operating Temperature:-20℃~+65℃
 - 4.Lib Time:1,000,000 times
 - 5.Storage Temperature:-30℃~+70℃
 - 6.Connect Material:PC
 - 7.Responses Time:≤10ms
 - 8.Transmittance:≥75%
 - 9.Surface Hardness:3H(General)
 - 10.Operation Force:50g~150g

11. Resistance:500 < PIN1, PIN2 < 2500
500 < PIN2, PIN4 < 2500
500 < PIN4, PIN5 < 2500
500 < PIN5, PIN1 < 2500

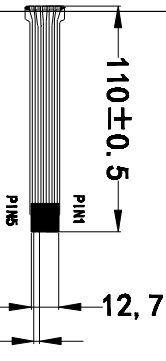

(UNLESS OTHERWISE STATED)
DIMENSIONS ANGLES ±0.5%

TOLERANCES	DIAMETERS	ANGLES
>500MM	±2.0MM	
100~ X 500MM	±1.2MM	
80~ X 100MM	±0.5MM	
40~ X 80MM	±0.4MM	
20~ X 40MM	±0.3MM	
<20MM	±0.1MM	

GreenTouch
綠域科技

GreenTouch Technology Co., Ltd

Model No.	Part No.	Size	Ratio
GT-9H-19A-1		19"	4:3
Structure	Gr-F	mm	Scale
Design	9H	2020.04.22	Page
Check	6H-H	2020.04.22	1/1
Revision	EE	2020.04.22	A0