


- Notes:
- 1.Type: Film to Glass
 2. Operating Voltage: $\le 10V$
 3. Operating Temperature: $20^{\circ}C \sim 65^{\circ}C$
 4. Life Time: 1,000,000 times
 5. Connect. Material: FPC
 6. Response Time: $\le 10ms$
 7. Linearity: $\le 1.5\%$
 8. Transmittance: >math>\ge 75\%</math>
 9. Surface Hardness: >math>3H</math> (penicil)
 10. Operation Force: >math>60g \sim 150g</math>

11. Resistance: <math>500 < PIN1, PIN2 < 2500</math>
<math>500 < PIN2, PIN4 < 2500</math>
<math>500 < PIN4, PIN5 < 2500</math>
<math>500 < PIN6, PIN1 < 2500</math>

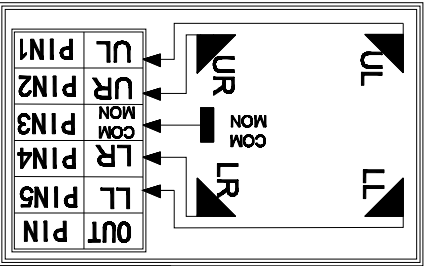

TOLERANCES
(UNLESS OTHERWISE STATED)
DECIMALS ANGLES 40.5%

>2000MM	±1.20MM
1800- X-2000MM	±0.50MM
1200- X-1800MM	±0.50MM
900- X-1200MM	±0.50MM
600- X-900MM	±0.50MM
300- X-600MM	±0.50MM
<300MM	±0.10MM

GreenTouch Technology Co., Ltd		Model No.	GT-2M-19C-1	Size	19"	Ratio	16:9
Structure	5+2E	Unit	mm	Unit	mm	Scale	1:1
Touch	4+1+15	Date	2013.3.8	Date	2013.3.8	Page	1/1
Client		Date	2013.3.8	Date	2013.3.8	Version	A0
Revision	E238	Date	2013.3.8	Date	2013.3.8		