
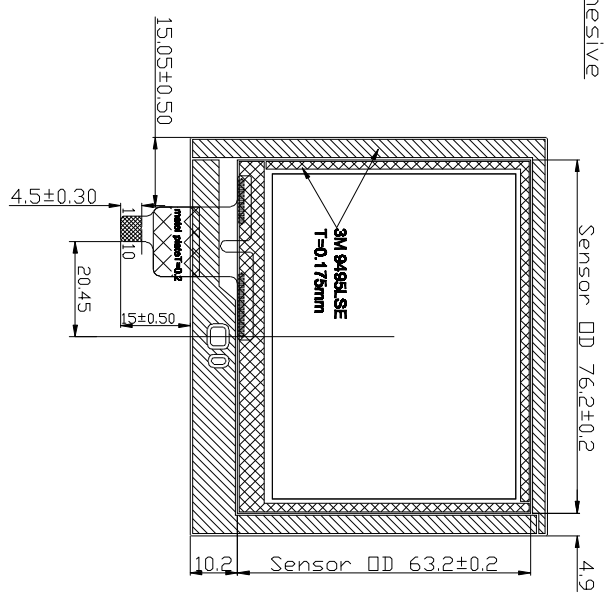
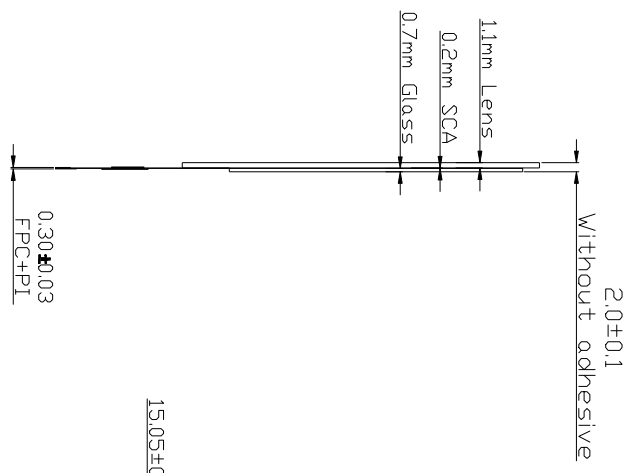


File No:

Front 1:1

Side 10:1

Back 1:1

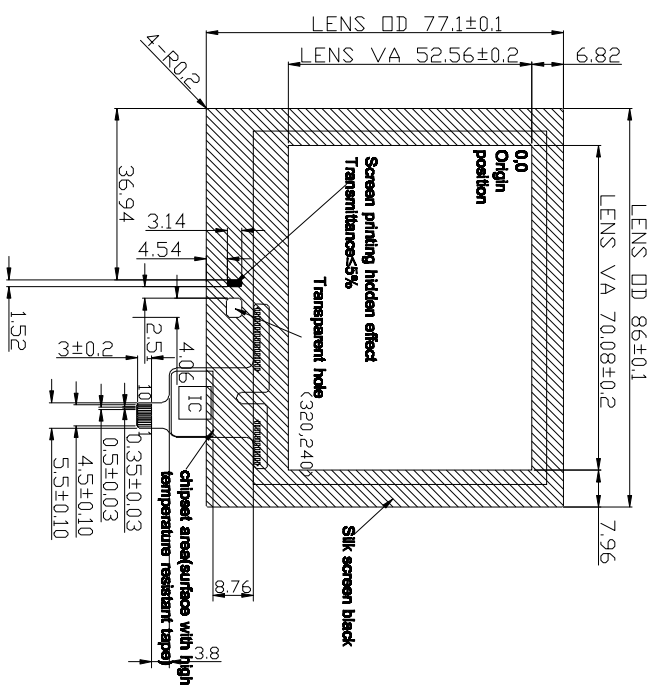

Technical Parameters:

- 1.IC model: FT5316
- 2.Working Volt: 2.8V-3.3 V;
- 12C Communication voltage: 2.8V-3.3 V
- 3.Transparency: ≥80%
- 4.Surface Hardness: 6H
- 5.Working environment: -10℃~+60℃, ≤90%RH
- 6.Storage environment: -20℃~+70℃, ≤90%RH
- 7.Tolerance±0.2mm
- 8.Meet ROHS environmental requirements.

物料定义

PN	定义
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	RST
8	NC
9	INT
10	VSS

客户确认签字:



GreenTouch Technology Co.,Ltd

DRAWN BY:	产品经理	VIEW:	第三角投影法
DATE:	日期	UNITS:	单位
CHECKED BY:	客户编号:	SCALE:	比例
APPROVED BY:	批准:	STANDARD TOLERANCE:	公差:
PRODUCT MODEL:	GT-CTR58022		
CUSTOMER ID:			