
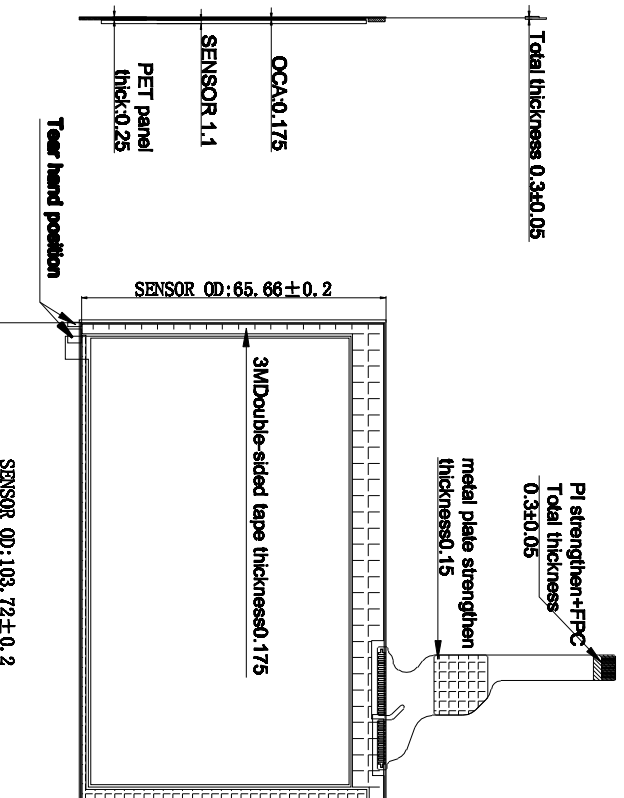


File No:

Front 1:1

Side 10:1

Back 1:1

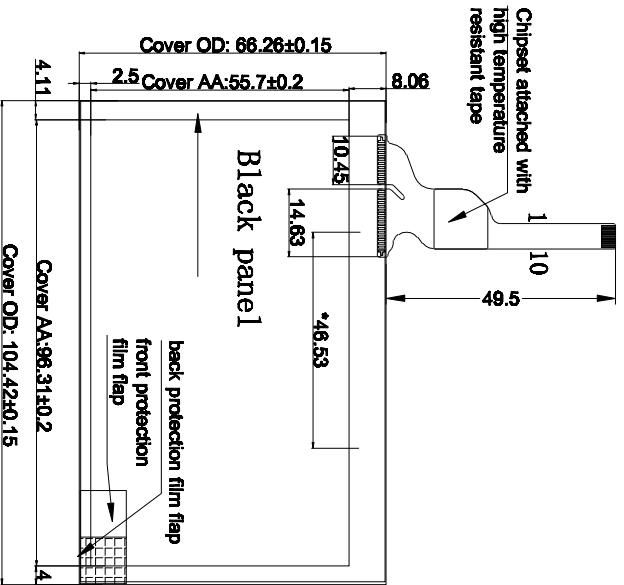

| Item | Specification |
|--------------|---------------|
| 1. Structure | PET/G |
| Z/C | GT911 |

| | |
|---------------------------------|------------------|
| 3. Operating temperature | -40°C~80°C<40%RH |
| 4. Storage temperature | -20°C~70°C<40%RH |
| 5. Transparency | 83% Min |
| 6. Surface Hardness | 3H(Pencil) |
| 7. Tolerance | ±0.2 |
| 8. Products are RoHS compliant. | |

FINISHING

| FIN | ASSIGNMENT |
|-----|------------|
| 1 | VID |
| 2 | VID |
| 3 | SC |
| 4 | NC |
| 5 | SDA |
| 6 | NC |
| 7 | RPT |
| 8 | WAVE |
| 9 | INT |
| 10 | GND |

客户确认签字:

格林威视
GreenTouch

GreenTouch Technology Co., Ltd

| | | | | | |
|---------------------|------|----------------|-------------|-------|--------|
| DRAWN BY: | 产品经理 | PRODUCT MODEL: | GT-CTP33001 | VIEW: | 第三角投影法 |
| CHECKED BY: | 审核 | CUSTOMER ID: | | UNITS | mm |
| APPROVED BY: | 批准 | DATE: | | SCALE | 1:1 |
| Standard tolerance: | 公差 | 网址: | | | |

| Version | Amend Record | Charger | Date |
|---------|----------------|---------|------|
| V1.0 | First Version. | | |