
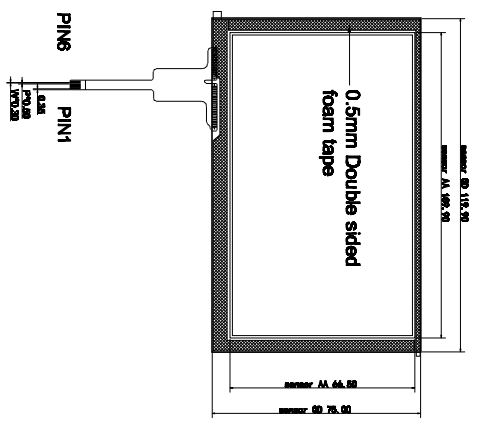
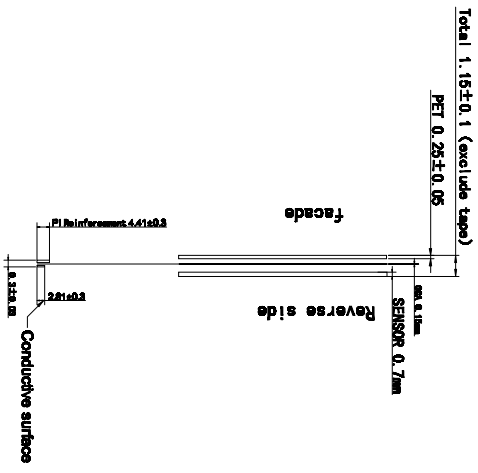


1	2	3	6	7	8					
File No:			<table border="1"> <tr> <td>版本</td> <td>Amend Record</td> </tr> <tr> <td>V1.0</td> <td>First Version.</td> </tr> </table>		版本	Amend Record	V1.0	First Version.	Charger	Date
版本	Amend Record									
V1.0	First Version.									

Front 1:1

Side 10:1

Back 1:1

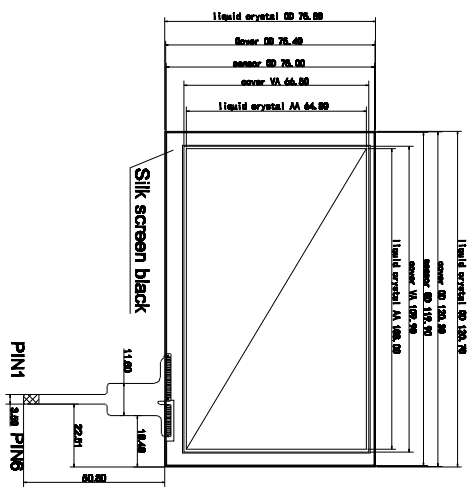

Tech Specs:

1. Structure: PET0.25mm+G(ITO SENSOR0.7mm)
- Line :FPC (PINCH=0.5mm) IC:FT5436
- Thickness : 1.65±0.1mm
- 2.Working Volt: 2.8V-3.3 V
- 3.Transparency:≥85±2%
- 4.Surface Hardness: ≥3H
- 5.Working environment: -20°C--+70°C, ≤90%RH
- 6.Storage environment: -30°C--+80°C, ≤90%RH
- 7.Tolerance: ±0.1

PIN	PIN definition
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

客户确认签字:

		GreenTouch Technology Co.,Ltd	
DRAWN BY:	产品型号:	VIEW:	
检查人:	GT-CTP50031	投影方式: 第三角投影法	
CHECKED BY:	客户编号:	UNITS	单位:
审核:	日期:	SCALE	比例:
APPROVED BY:	网址:		
批准:			
Standard tolerance			