


File No:

6	7	8
版本 V1.0	Amend Record First Version.	Charger Date


Front 1:1

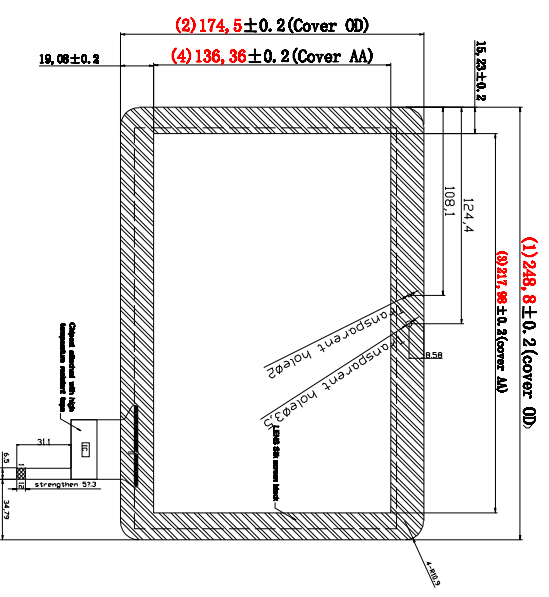

Side 10:1



Back 1:1

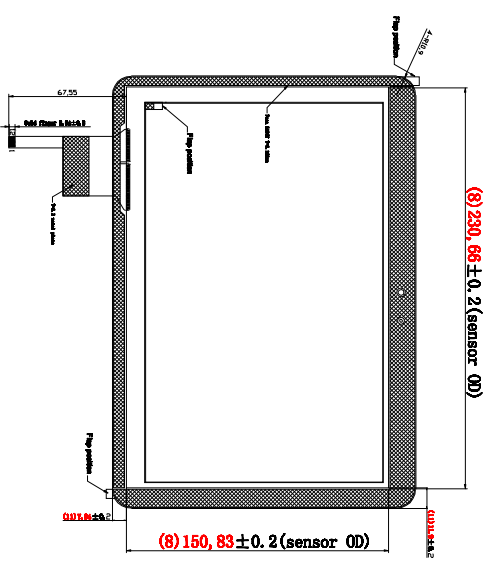

- Tech Specs:
- 1、Tech Specs: ITO GLASS:0.55mm cover GLASS:0.7mm Adhesive:0.165mm IC:GT928(RX20-TX30)
  - 2、Working Volt: 2.8V-3.3V
  - 3、Transparency: ≥87%
  - 4、Surface Hardness: ≥7H
  - 5、Working environment: -10℃~+60℃, ≤90%RH
  - 6、Storage environment: -20℃~+70℃, ≤90%RH
  - 7、Tolerance: ±0.20mm
  - 8、Standard ( ) is the key control size, Standard \* is CPK control size.
  - 9、Products are RoHS compliant.

PIN	Logic
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RSET
10	INT
11	VDD/3.3V
12	VDD/3.3V

客户确认签字:

DRAWN BY:	制图:	PRODUCT MODEL:	VIEW:
CHECKED BY:	审核:	GT-GTP10011	第三角投影法
APPROVED BY:	批准:	CUSTOMER ID:	UNIT:
审核:	标准:	客户编号:	mm
Standard tolerance:	公差:	日期:	SCALE:
		网址:	1:1