

SPECIFICATION FOR APPROVAL

- () Preliminary Specification
- () Final Specification

Title	55.0" QWUXGA TFTLCD
-------	---------------------

BUYER	AVNET
SET MODEL	

SUPPLIER	LG Display Co., Ltd.			
*MODEL	LD550EGE			
SUFFIX	FHM1 (RoHS Verified)			

APPROVED BY	SIGNATURE DATE						
,							
/							
Please return 1 copy for your confirmation with							
your signature and comments.							

APPROVED BY	SIGNATURE DATE				
H.S Song / Team Leader					
REVIEWED BY					
Y.S Park / Project Leader					
PREPARED BY					
Y.J Hong / Engineer					
TV Product Development Dept. LG Display Co., Ltd.					

CONTENTS

Number	ITEM	Page
	COVER	0
	CONTENTS	1
	RECORD OF REVISIONS	2
1	GENERAL DESCRIPTION	3
2	ABSOLUTE MAXIMUM RATINGS	4
3	ELECTRICAL SPECIFICATIONS	5
3-1	ELECTRICAL CHARACTERISTICS	5
3-2	INTERFACE CONNECTIONS	7
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	V by One SIGNAL SPECIFICATIONS	10
3-5	COLOR DATA REFERENCE	12
3-6	POWER SEQUENCE	13
4	OPTICAL SPECIFICATIONS	14
5	MECHANICAL CHARACTERISTICS	18
6	RELIABILITY	21
7	INTERNATIONAL STANDARDS	22
7-1	Safety	22
7-1	ENVIRONMENT	22
8	PACKING	23
8-1	INFORMATION OF LCM LABEL	23
8-2	PACKING FORM	23
9	PRECAUTIONS	24
9-1	MOUNTING PRECAUTIONS	24
9-2	OPERATING PRECAUTIONS	24
9-3	ELECTROSTATIC DISCHARGE CONTROL	25
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	25
9-5	STORAGE	25
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	25
9-7	Appropriate Condition for Commercial Display	26

Ver. 1.0 1/33

RECORD OF REVISIONS

Revision No.	Revision Date	Page	Description
0.1	Mar, 30, 2015	-	Preliminary Specification (First Draft)
		19	Update 5. Mechanical Characteristics _FRONT VIEW
		20	Update 5. Mechanical Characteristics _REAR VIEW
		14	Update table 10. OPTICAL CHARACTERISTICS
1.0	June, 17, 2015	3	Update . General Description
		6	Update table 3. ELECTRICAL CHARACTERISTICS
		7	Update 3-2. Interface Connections
		10	Update table7. Eye Mask Specification
		11	Update 3-4-2. V by One Input Signal Characteristics
		14	Update table 10. OPTICAL CHARACTERISTICS
		18	Update table 12. MECHANICAL CHARACTERISTICS
		19	Update 5. Mechanical Characteristics _FRONT VIEW
		21	Update table 13. ENVIRONMENT TEST CONDITION
		26	Update 9-7. Appropriate Condition for Commercial Display
		29	Update Pallet Label
		-	Final CAS specification

Ver. 1.0 2/33

1. General Description


The LD550EGE is a Color Active Matrix Liquid Crystal Display with an integral Light Emitting Diode (LED) backlight system. The matrix employs a-Si Thin Film Transistor as the active element.

It is a transmissive display type which is operating in the normally black mode. It has a 54.64 inch diagonally measured active display area with QWUXGA resolution (2160 vertical by 3840 horizontal pixel array). Each pixel is divided into RGB or WRG or BWR or GBW or dots which are arranged in vertical stripes.

Gray scale or the luminance of the sub-pixel color is determined with a 10-bit gray scale signal for each dot. Therefore, it can present a palette of more than 1.07Bilion colors.

It has been designed to apply the 10-bit 8 Lane V by One interface.

It is intended to support LCD TV, PCTV where high brightness, super wide viewing angle, high color gamut, high color depth and fast response time are important.

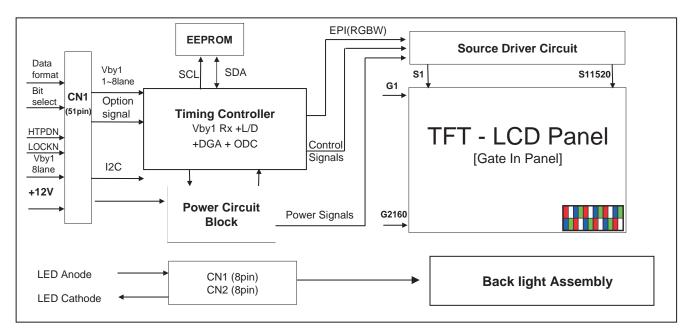

General Features

Active Screen Size	54.64 inches(1387.8mm) diagonal	
Outline Dimension	1233.4 (H) x 706.8 (V) x 12.0 (D) (Typ.)	
Pixel Pitch	0.315 mm x 0.315 mm	
Pixel Format	3840 horiz. by 2160 vert. Pixels, RGBW stripe arrangement	
Color Depth	10bit(D), 1.07 Billon colors	
Luminance, White	500cd/m² (Center 1point ,Typ.)	
Viewing Angle (CR>10) Viewing angle free (R/L 178 (Min.), U/D 178 (Min.))		
Power Consumption	Total 79.72W (Typ.) [Logic= 13.02W, LED Backlight= 66.7 W (IF_cathode=180mA)]	
Weight	12.5Kg (Typ.), 13.0Kg(Max.)	
Display Mode	Transmissive mode, Normally black	
Surface Treatment	Hard coating(3H), Anti-glare treatment of the front polarizer (Haze 1% Typ.)	

Ver. 1.0 3/33

2. Absolute Maximum Ratings


The following items are maximum values which, if exceeded, may cause faulty operation or permanent damage to the LCD module.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter		Currely of	Value		Unit	Netes
		Symbol	Min	Max	Unit	Notes
Power Input Voltage	LCD Circuit	VLCD	-0.3	+14.0	VDC	
LED Input Voltage Forward Voltage		VF	-	+200.4	VDC	1
T-Con Option Selection	VLOGIC	-0.3	+4.0	VDC		
Operating Temperature	Тор	0	+50	°C	2.2	
Storage Temperature	Тѕт	-20	+60	°C	2,3	
Panel Front Temperature	Tsur	-	+68	°C	4	
Operating Ambient Hum	Нор	10	90	%RH	2.2	
Storage Humidity	Нѕт	5	90	%RH	2,3	

Notes 1. Ambient temperature condition (Ta = 25 ± 2 °C)

- 2. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be Max 39°C, and no condensation of water.
- 3. Gravity mura can be guaranteed below 40°C condition.
- 4. The maximum operating temperatures is based on the test condition that the surface temperature of display area is less than or equal to 68°C with LCD module alone in a temperature controlled chamber. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 68?. The range of operating temperature may be degraded in case of improper thermal management in final product design.

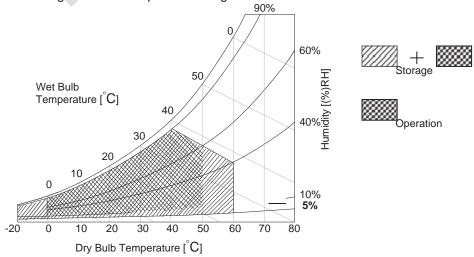

Ver. 1.0 4/33

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power for the LCD circuit. The other Is used for the LED backlight.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter		Symbol		Value	Unit	Note	
		Syllibol	Min	Тур	Max	Offic	NOTE
Circuit :							
Power Input Voltage	,	VLCD	10.8	12	13.2	VDC	
Power Input Current	Barrard Comment		-	1085	1410	mA	1
Fower input Current		ILCD	-	1610	2093	mA	2
T-CON Option	Input High Voltage	V_{IH}	2.7	-	3.6	VDC	
Selection Voltage	Input Low Voltage	V_{IL}	0	-	0.7	VDC	
Power Consumption		PLCD	-	13.02	16.92	Watt	1
Rush current		Irush	-	-	10	А	3

Notes 1. The specified current and power consumption are under the V_{LCD} =12.0V, Ta=25 ±2°C, f_V=60Hz condition, and mosaic pattern(8 x 6) is displayed and f_V is the frame frequency.

- 2. The current is specified at the maximum current pattern.
- 3. The duration of rush current is about 2ms and rising time of power input is 0.5ms (min.).
- 4. Ripple voltage level is recommended under $\pm 5\%$ of typical voltage

White: 1023 Gray
Black: 0 Gray

Mosaic Pattern(8 x 6)

Ver. 1.0 5/33

Table 3. ELECTRICAL CHARACTERISTICS (Continue)

Parameter		Symbol	Symbol				Note	
Faia	illetei	Symbol	Min Typ		Max	Unit	Note	
Backlight Asseml	oly:							
Forward Current	Anode	I _{F (anode)}	-	180	-	mAdc	±5%	
(one array)	Cathode	I _{F (cathode)}	-	180	-	mAdc	2, 3	
Forward Voltage		V_{F}	170.4	185.4	200.4	Vdc	4	
Forward Voltage V	ariation	AV _F	-	-	4.9	Vdc	5	
Power Consumption	on	P_BL	-	66.7	-	W	6	
Burst Dimming Dut	ty	On duty	1		100	%		
Burst Dimming Frequency		1/T	95		182	Hz	8	
LED Array : (APP	ENDIX-V)							
Life Time			30,000	50,000	-	Hrs	7	


Notes: The design of the LED driver must have specifications for the LED array in LCD Assembly.

The electrical characteristics of LED driver are based on Constant Current driving type.

The performance of the LED in LCM, for example life time or brightness, is extremely influenced by the characteristics of the LED Driver. So, all the parameters of an LED driver should be carefully designed. When you design or order the LED driver, please make sure unwanted lighting caused by the mismatch of the LED and the driver (no lighting, flicker, etc) has never been occurred. When you confirm it, the LCD—Assembly should be operated in the same condition as installed in your instrument.

- 1. Electrical characteristics are based on LED Array specification.
- 2. Specified values are defined for a Backlight Assembly. (IBL:2 LED array/LCM)
- 3. Each LED array has one anode terminal and one cathode terminal.

 The forward current(I_F) of the anode terminal is 180mA and it supplies 180mA into an one strings, respectively

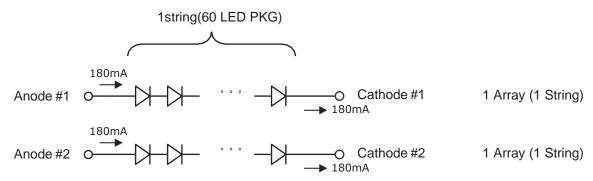

- 4. The forward voltage(V_F) of LED array depends on ambient temperature (Appendix-V)
- 5. AV_F means Max string V_F-Min string V_F in one Backlight. So VF variation in a Backlight isn't over Max.4.9V
- 6. Maximum level of power consumption is measured at initial turn on.
 - Typical level of power consumption is measured after 1hrs aging at 25 \pm 2°C.
- 7. The life time(MTTF) is determined as the time at which brightness of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at 25 ±2°C, based on duty 100%.
- 8. The reference method of burst dimming duty ratio.

It is recommended to use synchronous V-sync frequency to prevent waterfall (Vsync * 2 =Burst Frequency)

Though PWM frequency is over 182Hz (max252Hz), function of backlight is not affected.

Ver. 1.0 6/33

3-2. Interface Connections

This LCD module employs three kinds of interface connection, 51-pin connector is used for the module electronics and 8-pin, 8-pin connectors are used for the integral backlight system.

3-2-1. LCD Module

- LCD Connector(CN1): IS050-C51B-C39-C (manufactured by UJU)

Table 4. MODULE CONNECTOR(CN1) PIN CONFIGURATION

No	Symbol	Description	T	No	Symbol	Description
1	VLCD	Power Supply +12.0V	T	27	GND	Ground
2	VLCD	Power Supply +12.0V	Ť	28	Rx0n	V-by-One HS Data Lane 0
3	VLCD	Power Supply +12.0V	Ť	29	Rx0p	V-by-One HS Data Lane 0
4	VLCD	Power Supply +12.0V	ĺ	30	GND	Ground
5	VLCD	Power Supply +12.0V	Ť	31	Rx1n	V-by-One HS Data Lane 1
6	VLCD	Power Supply +12.0V	Ť	32	Rx1p	V-by-One HS Data Lane 1
7	VLCD	Power Supply +12.0V	Ť	33	GND	Ground
8	VLCD	Power Supply +12.0V	Ť	34	Rx2n	V-by-One HS Data Lane 2
9	NC	NO CONNECTION	Ť	35	Rx2p	V-by-One HS Data Lane 2
10	GND	Ground	Τ	36	GND	Ground
11	GND	Ground	Ť	37	Rx3n	V-by-One HS Data Lane 3
12	GND	Ground	Τ	38	Rx3p	V-by-One HS Data Lane 3
13	GND	Ground	Ť	39	GND	Ground
14	PWM TIN	External VBR (From System)	Τ	40	Rx4n	V-by-One HS Data Lane 4
15	PWM TOUT	External VBR (For System)	Τ	41	Rx4p	V-by-One HS Data Lane 4
16	NC	NO CONNECTION		42	GND	Ground
17	NC	NO CONNECTION		43	Rx5n	V-by-One HS Data Lane 5
18	NC	NO CONNECTION		44	Rx5p	V-by-One HS Data Lane 5
19	NC	NO CONNECTION		45	GND	Ground
20	NC	NO CONNECTION		46	Rx6n	V-by-One HS Data Lane 6
21	Bit SEL	'H' = 10bit(D) , 'L' = 8bit		47	Rx6p	V-by-One HS Data Lane 6
22	NC	NO CONNECTION	T	48	GND	Ground
23	AGP or NSB	'H' : AGP 'L' : NSB (No signal Black)		49	Rx7n	V-by-One HS Data Lane 7
24	GND	Ground		50	Rx7p	V-by-One HS Data Lane 7
25	HTPDN	Hot plug detect		51	GND	Ground
26	LOCKN	Lock detect	T	-	-	-

Note

- 1. All GND (ground) pins should be connected together to the LCD module's metal frame.
- 2. All Input levels of V-by-One signals are based on the V-by-One-HS Standard Version 1.4
- 3. #9 & #16~#20 & #22 NC(No Connection): These pins are used only for LGD (Do not connect)
- 4. Specific pin No. #23 is used for "No signal detection" of system signal interface. It should be GND for NSB (No Signal Black) while the system interface signal is not. If this pin is "H", LCD Module displays AGP (Auto Generation Pattern).


Ver. 1.0 7/33


3-2-2. Backlight Module

[CN201]

1) LED Array FFC Ass'y Connector (Plug) 25035WR-H02G (manufactured by YEONHO)

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION(CN201)

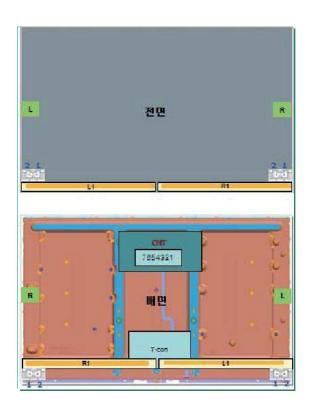

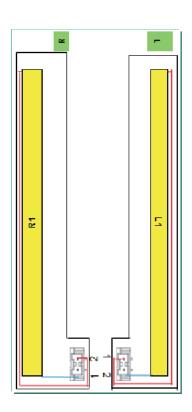

	LED Driver CNT					
Pin No Symbol		Description				
1	L Cathode	LED Output Current L				
2	N.C					
3	Anode L	LED Input Current for L				
4	N.C					
5	R Cathode	LED Output Current R				
6	N.C					
7	Anode R	LED Input Current for R				

Ver. 1.0 8/33

3-3. Signal Timing Specifications

Table 6 shows the signal timing required at the input of the Vx1 transmitter. All of the interface signal timings should be satisfied with the following specification for normal operation.

Table 6. TIMING TABLE (DE Only Mode)

ITEM		Symbol	Min	Тур	Max	Unit	Note
	Display Period	t HV	480	480	480	t clk	3840/8
Horizontal	Blank	t нв	50	70	120	t clk	1
	Total	t HP	530	550	600	t clk	
	Display Period	tvv	2160	2160	2160	Lines	
Vertical	Blank	t vB	40	90	600	Lines	1
	Total	t vp	2200	2250	2760	Lines	

ITE	M	Symbol	Min	Тур	Max	Unit	Note
	DCLK	fclk	60	74.25	78.00	MHz	
Frequency	Horizontal	fн	121.8	135	140	KHz	2
	Vertical	f∨	47	60	63	Hz	2

notes: 1. The input of HSYNC & VSYNC signal does not have an effect on normal operation (DE Only Mode). If you use spread spectrum of EMI, add some additional clock to minimum value for clock margin.

- 2. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate and the horizontal frequency
- 3. Spread Spectrum Rate (SSR) is limited to $\pm 0.5\%$ center spread at 30KHz

Ver. 1.0 9/33

3-4. V by One input signal Characteristics

3-4-1. V by One Input Signal Timing Diagram

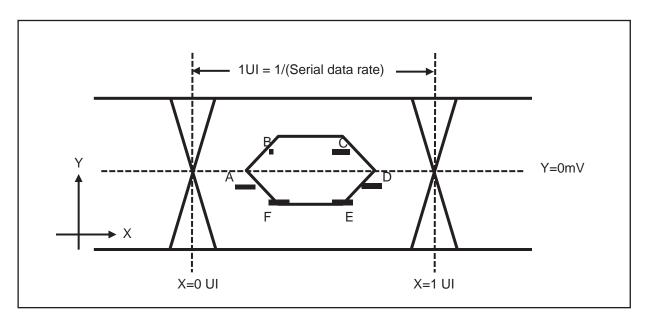


Table7. Eye MaskSpecification

	X[UI]	Note	Y[mV]	Note
А	0.25 (max)	2	0	-
В	0.3 (max)	2	50	3
С	0.7(min)	3	50	3
D	0.75(min)	3	0	-
E	0.7(min)	3	I -50 I	3
F	0.3(max)	2	I -50 I	3


notes 1. All Input levels of V by One signals are based on the V by One HS Standard Ver. 1.4

- 2. This is allowable maximum value.
- 3. This is allowable minimum value.
- 4. The eye diagram is measured by the oscilloscope and receiver CDR characteristic must be emulated.

PLL bandwidth: 15 MhzDamping Factor: 1.5

Ver. 1.0 10/33

3-4-2. V by One Input Signal Characteristics

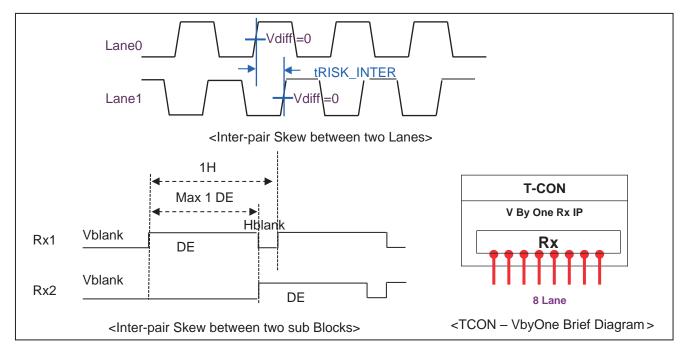

Description	Symbol	Min	Max	Unit	notes
Allowable inter-pair skew between lanes	tRISK_INTER	-	5	UI	1,2

Notes 1.1UI = 1/serial data rate

2. it is the time difference of the differential voltage between any two lanes in one sub block.

Ver. 1.0 11/33

3-5. Color Data Reference

The brightness of each primary color (red, green, blue) is based on the 10bit or 8bit gray scale data input for the color. The higher binary input, the brighter the color. Table 8 provides a reference for color versus data input.

Table 8. COLOR DATA REFERENCE

	Packer input & Unpacker output	30bpp RGB (10bit)	24bpp RGB (8bit)
	D[0]	R[2]	R[0]
	D[1]	R[3]	R[1]
	D[2]	R[4]	R[2]
Byte0	D[3]	R[5]	R[3]
Бугео	D[4]	R[6]	R[4]
	D[5]	R[7]	R[5]
	D[6]	R[8]	R[6]
	D[7]	R[9]	R[7]
	D[8]	G[2]	G[0]
	D[9]	G[3]	G[1]
	D[10]	G[4]	G[2]
Distant	D[11]	G[5]	G[3]
Byte1	D[12]	G[6]	G[4]
	D[13]	G[7]	G[5]
	D[14]	G[8]	G[6]
	D[15]	G[9]	G[7]
	D[16]	B[2]	B[0]
	D[17]	B[3]	B[1]
	D[18]	B[4]	B[2]
Byte2	D[19]	B[5]	B[3]
Dyle2	D[20]	B[6]	B[4]
	D[21]	B[7]	B[5]
	D[22]	B[8]	B[6]
	D[23]	B[9]	B[7]
	D[24]	Don't care	
	D[25]	Don't care	
	D[26]	B[0]	
Duto?	D[27]	B[1]	
Byte3	D[28]	G[0]	
	D[29]	G[1]	
	D[30]	R[0]	
	D[31]	R[1]	

Ver. 1.0 12/33

3-6. Power Sequence

3-6-1. LCD Driving circuit

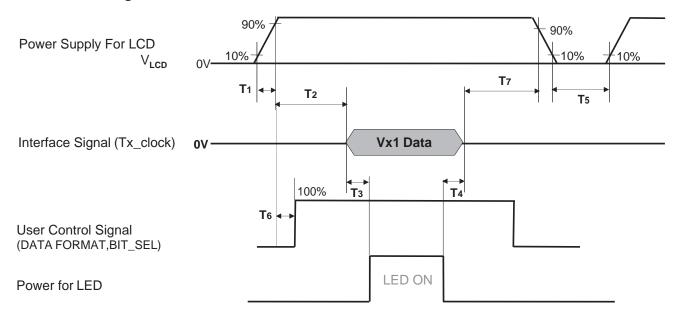


Table 9. POWER SEQUENCE

Dovementor		l loit	Notes			
Parameter	Min	Тур	Max	Unit	Notes	
T1	0.5	-	20	ms	1	
T2	0	-	-	ms	2	
Т3	400	-	-	ms	3	
T4	100	-	-	ms	3	
T5	1.0	-	-	S	4	
T6	0	-	T2	ms	5	
Т7	0	-	-	ms	6	

Note:

- 1. Even though T1 is over the specified value, there is no problem if I2T spec of fuse is satisfied.
- 2. If T2 is satisfied with specification after removing V by One Cable, there is no problem.
- 3. The T3 / T4 is recommended value, the case when failed to meet a minimum specification, abnormal display would be shown. There is no reliability problem.
- 4. T5 should be measured after the Module has been fully discharged between power off and on period.
- 5. If the on time of signals (Interface signal and user control signals) precedes the on time of Power (V_{LCD}), it will be happened abnormal display. When T6 is NC status, T6 doesn't need to be measured.
- 6. It is recommendation specification that T7 has to be 0ms as a minimum value.
- M Please avoid floating state of interface signal at invalid period.
- When the power supply for LCD (VLCD) is off, be sure to pull down the valid and invalid data to 0V.

Ver. 1.0 13/33

4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' and stable in a dark environment at $25\pm2^{\circ}$ C. The values are specified at distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0 °. FIG. 1 shows additional information concerning the measurement equipment and method.

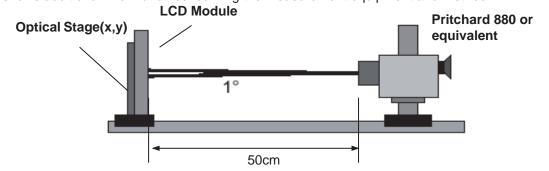


FIG. 1 Optical Characteristic Measurement Equipment and Method

Table 10. OPTICAL CHARACTERISTICS

 $Ta=25\pm2^{\circ}C,\ V_{LCD}=12V,\ fv=60Hz,\ Dclk=74.25MHz, EXTVbr-B=100\%$

Parameter		Curan	Symbol		Value				
		Sym			Тур	Max	Unit	notes	
Contrast	Ratio		CF	₹	800	1100	-		1
Surface I	Luminance,	white	L _{wH}	2D	400	500	-	cd/m²	2
Luminan	ce Variation		δ_{WHITE}	9P	65	-	-	%	3
Daanana	. T:	Gray to Gray	G to	G		8	12	ms	4
Respons	e rime	Uniformity	δст	0 G	-	-	1		4
		DED	Rx	(0.641			
		RED	Ry	/		0.336			
		GREEN	Gx Gy			0.314			
Color Co	ordinates				Тур	0.596	Тур		
[CIE1931	1]	BLUE	Bx		-0.03	0.153	+0.03		
			Ву			0.060			
			Wx			0.281			
		WHITE	Wy			0.288			
Color Ter	nperature					10,000		K	
Color Ga	mut					68		%	
		right(_φ =0°)	er (x a	axis)	89	-	-		
Anala	2D	left (₍ =180°)	Ө (х а	ıxis)	89	-	-		_
	(CR>10)	up (_ф 90°)	ө (у а	axis)	89	-	-	degree	5
		down (_ф 270°)	ө (у а	axis)	89	-	-		
Gray Sca	ale				-	-	-		6

Ver. 1.0 14/33

notes: 1. Contrast Ratio(CR) is defined mathematically as:

Surface Luminance with all white pixels

Contrast Ratio =

Surface Luminance with all black pixels

It is measured at center 1-point.

2. Surface luminance is determined after the unit has been 'ON' and 1 Hour after lighting the backlight in a dark environment at 25±2°C. Surface luminance is the luminance value at center 1-point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see the FIG. 2.

L: Low Power Mode, H: High Power Mode.

3. The variation in surface luminance, WHITE is defined as:

WHITE(9P) = Minimum $(L_{on1}, L_{on2} \sim L_{on8}, L_{on9}) / Maximum <math>(L_{on1}, L_{on2} \sim L_{on8}, L_{on9})^*100$

Where L_{on1} to L_{on9} are the luminance with all pixels displaying white at 9 locations.

For more information, see the FIG. 2.

4. Response time is the time required for the display to transit from G(N) to G(M) (Rise Time, TrR) and from G(M) to G(N) (Decay Time, TrD). For additional information see the FIG. 3. (N<M) G to G Spec stands for average value of all measured points. Photo Detector: RD-80S / Field: 2°</p>

Filoto Detector . ND-003 / Field . Z

. Gray to Gray / Response time uniformity is Reference data. Appendix VI

- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD module surface. For more information, see the FIG. 4.
- 6. Gray scale specification

Gamma Value is approximately 2.2. For more information, see the Table 11..

Table 11. GRAY SCALE SPECIFICATION

Gray Level	Luminance [%] (Typ)
LO	0.091
L63	0.27
L127	1.04
L191	2.49
L255	4.68
L319	7.66
L383	11.5
L447	16.1
L511	21.6
L575	28.1
L639	35.4
L703	43.7
L767	53.0
L831	63.2
L895	74.5
L959	86.7
L1023	100

Ver. 1.0 15/33

Measuring point for surface luminance & measuring point for luminance variation.

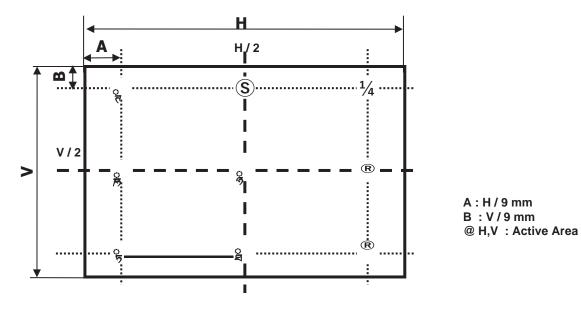


FIG. 2 9 Points for Luminance Measure

Response time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

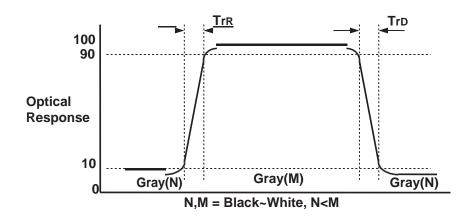


FIG. 3 Response Time

Ver. 1.0 16/33

Dimension of viewing angle range

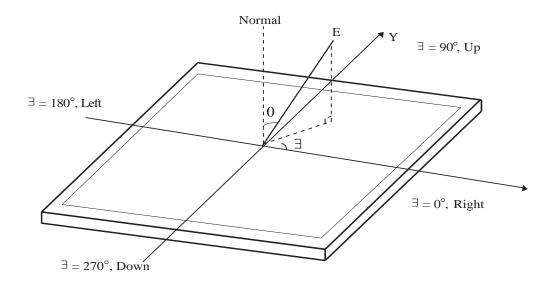


FIG. 4 Viewing Angle

Ver. 1.0 17/33

5. Mechanical Characteristics

Table 12 provides general mechanical characteristics.


Table 12. MECHANICAL CHARACTERISTICS

Item	Value		
	Horizontal	1233.4 mm	
Outline Dimension	Vertical	706.8 mm	
	Depth	12.0 mm	
D 14	Horizontal	1214.6mm	
Bezel Area	Vertical	685.4mm	
A .: D: 1 A	Horizontal	1209.6 mm	
Active Display Area	Vertical	680.40 mm	
Weight	12.5Kg (Typ.), 13.0Kg(Max)		
Cons Ton	Material	EGI, PCM	
Case Top	Case Top Color	Black	

Note: Please refer to a mechanic drawing in terms of tolerance at the next page.


Ver. 1.0 18/33

[FRONT VIEW]

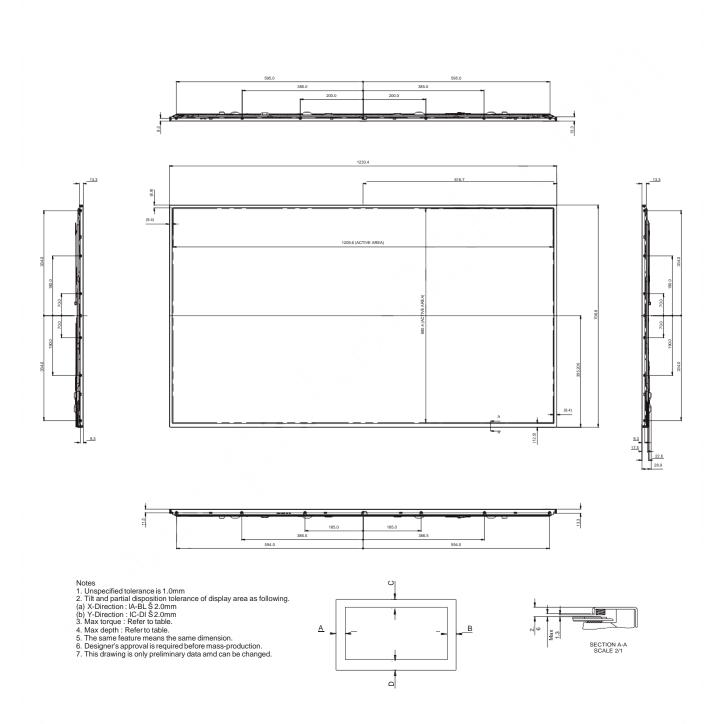

Ver. 1.0 19/33

[REAR VIEW]

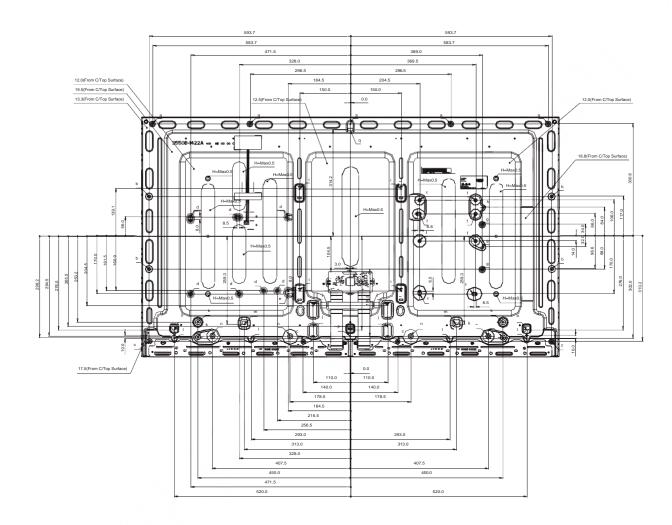

Item	UDM Height	Тар	Max Depth (mm)	Max.Torque (kgf.cm)	Notes
а	3.5	M3.0	4.6	7.0	Back Cover
b	5.5	M3.0	6.6	7.0	Back Cover
С	3.0	M3.0	3.7	7.0	Back Cover
d	4.5	M3.0	4.3	7.0	PSU
е	4.5	M4.0	4.3	7.0	PSU
f	9.8	M3.0	9.6	7.0	MAIN
g	4.1	M3.0	3.9	7.0	MAIN
h	3.0	M3.0	2.8	7.0	MAIN
i	3.0	M3.0	10.3	7.0	VESA
j	5.1	M3.0	12.4	7.0	STAND (1POLE)
k	9.4	M4.0	6.5	10.0	STAND (PEMNUT)
I	2.0	M3.0	5.6	7.0	DECOI
m	7.1	-	7.0	-	Speaker bracket
n	9.1	-	9.0	-	Speaker bracket
0	3.0	-	3.0	-	Back Cover
р	2.0	-	2.0	-	Back Cover
q	3.0	-	3.0	-	Back Cover

Ver. 1.0 20/33

6. Reliability

Table 13. ENVIRONMENT TEST CONDITION

No	Test Item	Condition
1	High temperature storage test	Ta= 60°C 90% 240h
2	Low temperature storage test	Ta= -20°C 240h
3	High temperature operation test	Ta= 50°C 50%RH 500h
4	Low temperature operation test	Ta= 0°C 500h
5	Humidity condition Operation	Ta= 40 °C, 90%RH
6	Altitude operating storage / shipment	0 – 16,400 ft 0 - 40,000 ft
7	Vibration test (non-operating)	Wave form : Random Vibration Level 1.0Grms Bandwidth : 10 ~ 300Hz Duration : X, Y, Z Each direction Per 10min
8	Shock test (non-operating)	Shock Level : 20Grms Waveform : Half Sine Wave, 11ms Duration : X, Y, Z One time each direction
9	Panel Push Test (Module Condition)	Max 6kgf

Note: 1. Before and after Reliability test, LCM should be operated with normal function.

Ver. 1.0 21/33

7. International Standards

7-1. Safety

- a) UL 60950-1, Underwriters Laboratories Inc.
 Information Technology Equipment Safety Part 1 : General Requirements.
- b) CAN/CSA-C22.2 No. 60950-1-07, Canadian Standards Association. Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1, European Committee for Electrotechnical Standardization (CENELEC). Information Technology Equipment Safety Part 1 : General Requirements.
- d) IEC 60950-1, The International Electrotechnical Commission (IEC).
 Information Technology Equipment Safety Part 1 : General Requirements

7-2. Environment

a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011

Ver. 1.0 22/33

8. Packing

8-1. Information of LCM Label

a) Lot Mark

А	В	С	D	E	F	G	Н	I	J	K	L	М
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH) D : YEAR

E: MONTH $F \sim M$: SERIAL NO.

notes

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	В	С	D	Е	F	G	Н	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	Α	В	С

b) Location of Lot Mark

Serial NO. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one Pallet: 22 pcs

b) Pallet Size: 1440 mm(W) X 1140 mm(D) X 950 mm(H)

Ver. 1.0 23/33

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- (1) You must mount a module using specified mounting holes (Details refer to the drawings).
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and colorfading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. Operating Precautions

- (1) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (2) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer
- (3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (7) A screw which is fastened up the steels should be a machine screw. (if not, it can causes conductive particles and deal LCM a fatal blow)
- (8) Please do not set LCD on its edge.
- (9) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

Ver. 1.0 24/33

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.

 It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

9-6. Handling Precautions for Protection Film

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Ver. 1.0 25/33

9-7. Appropriate Condition for Commercial Display

- Generally large-sized LCD modules are designed for consumer applications (TV).

 Accordingly, a long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize module's lifetime and function, several operating usages are required.
- 1. Normal operating condition
 - Temperature: 0 ~ 40?
 - Operating Ambient Humidity: 10 ~ 90 %
 - Display pattern: dynamic pattern (Real display)

Note) Long-term static display can cause image sticking.

- 2. Operating usages under abnormal condition
 - a. Ambient condition
 - Well-ventilated place is recommended to set up Commercial Display system.
- b. Power and screen save
- Periodical power-off or screen save is needed after long-term display.
- 3. Operating usages to protect against image sticking due to long-term static display
 - a. Suitable operating time: under 24 hours aday.
 - (* The moving picture can be allowed for 24 hours a day)
- b. Static information display recommended to use with moving image.
- Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.
- c. Background and character (image) color change
 - Use different colors for background and character, respectively.
- Change colors themselves periodically.
- d. Avoid combination of background and character with large different luminance.
- 1) Abnormal condition just means conditions except normal condition.
- 2) Black image or moving image is strongly recommended as a screen save.
- 4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.
- 5. Module should be turned counter-clockwise based on front view when used in portrait mode.

Ver. 1.0 26/33

APPENDIX- I

■ Pallet Ass'y

1




2



3






5



6




\(\phi\)

NO.	DESCRIPTION	MATERIAL
ূ	LCD Module	55INCH
ृत	AL BAG	AL
S	PALLET	PLYWOOD 1440×1140×134.5mm
1/4	PACKING,BOTTOM	PAPER
္က	PACKING,SIDE RIB	EPS
®	PACKING, TOP	PAPER
្ង	BAND,CLIP	STEEL or PP
្ធប	LABEL	YUPO 80G 100X70

Ver. 1.0 27/33

APPENDIX- II-1

■ LCM Label

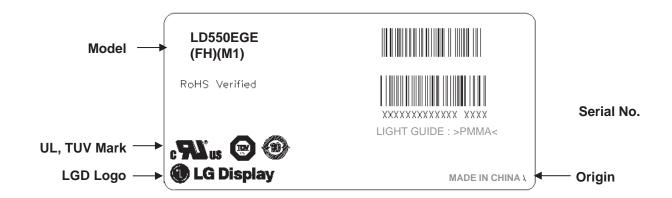

■ Production site


- LG Display (Guangzhou) Co., LTD

notes 1. The origin of LCM Label will be changed according to the production site.

Ver. 1.0 28/33

APPENDIX- II - 2


■ Pallet Label

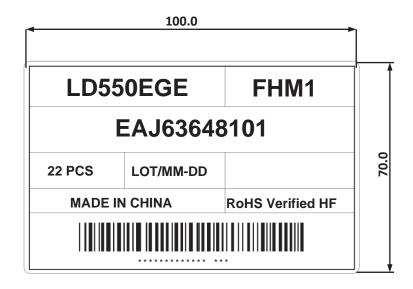


Ver. 1.0 29/33

APPENDIX- III

■ Required signal assignment for Flat Link (Thine: THCV215) Transmitter

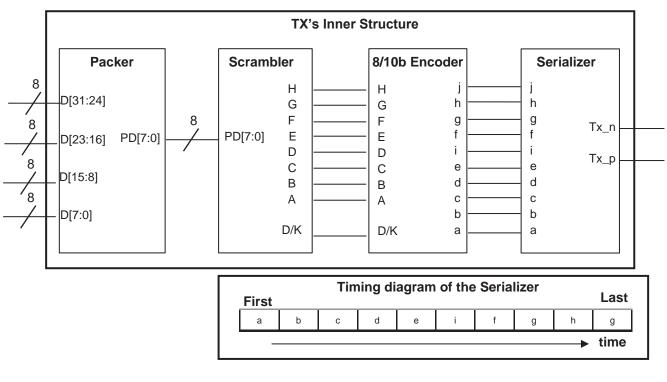

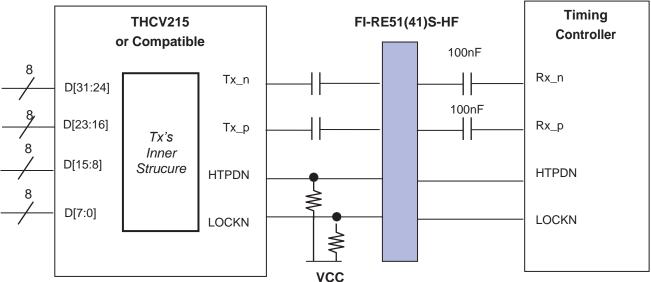


notes: 1. The LCD module uses a 100 nF capacitor on positive and negative lines of each receiver input.

- 2. Refer to Vx1 Transmitter Data Sheet for detail descriptions. (THCV215 or Compatible)
- 3. About Module connector pin configuration, Please refer to the Page 7


Ver. 1.0 30/33

APPENDIX- IV

- Option Pin Circuit Block Diagram
 - 1) Circuit Block Diagram of Bit Selection pin

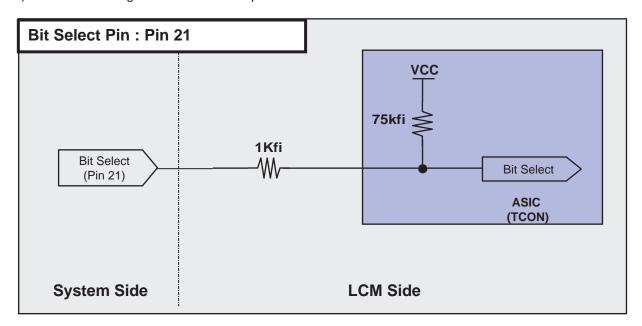

2) Circuit Block Diagram of AGP Selection pin

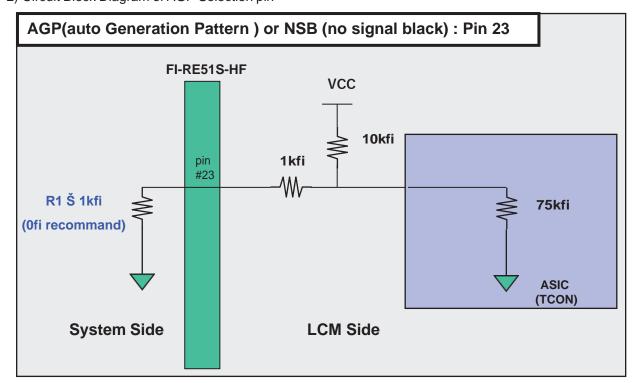


Ver. 1.0 31/33

APPENDIX- V


■ LED Array Electrical Spec

Item	Condition	Min	Тур	Max	Uint	Remark
Forward voltage(Vf)		170.4	185.4	200.4	V	Ta=25 ?
AVf*1	lfm=180mA	-	-	4.9	V	

■ Forward Current vs. Forward Voltage




■ Ambient Temperature vs. Forward Voltage



Ver. 1.0 32/33

APPENDIX- VI

■ input mode of pixel data

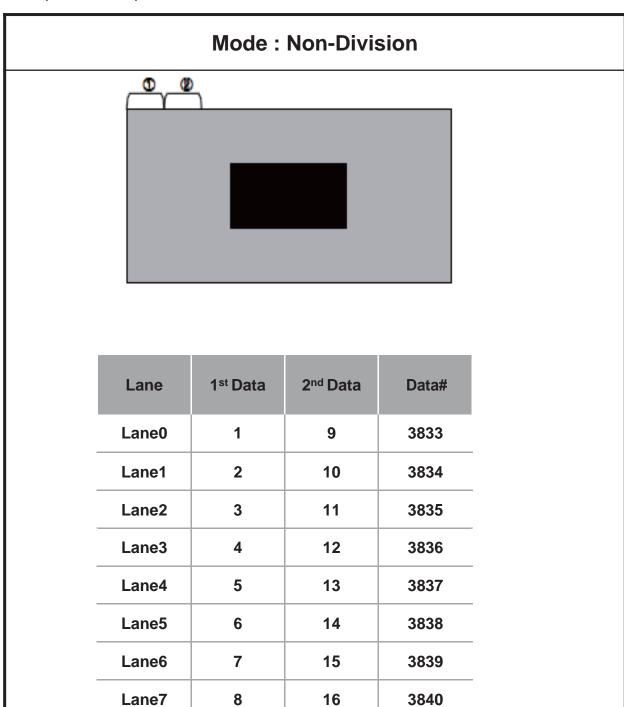

Ver. 1.0 33/33